

Model 425

Wing Union Pressure Transmitter



DESCRIPTION

The Model 425 Wing Union Pressure Transmitters are rugged sensors designed for use with 1502 wing unions in demanding land-based and off-shore applications.

The isolated pressure sensing diaphragm minimizes zero shift during hammer-up and eliminates long-term signal drift in the field. The sensor diaphragm and wing union fitting are machined as one part. The Model 425 is constructed as an all-welded assembly using a deep penetration, proprietary, electron beam

welding process which also ensures hermetic integrity for all field conditions. These transmitters incorporate special assembly processes to vibration and shock proof the components to ensure performance is maintained during the rigors of fracturing and cementing applications. The 1502 wing union compatible fittings are machined of Inconel® X-750 providing service with highly abrasive and corrosive media. This configuration complies with NACE Standard MR-01-75 (1980) for corrosive service.

FEATURES

- Quick delivery service
- Long life X-750 material
- Rugged, robust design
- RFI/EMI protected
- 0.2 % accuracy
- Optional on-board temperature sensor
- Intrinsically safe
- CE approved

Model 425

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Pressure ranges	0 psi to 5000 psi; 0 psi to 6000 psi; 0 psi to 10000 psi; 0 psi to 15000 psi; 0 psi to 20000 psi ³
Accuracy ¹	±0.2 % best fit straight line
Calibration	5-point calibration: 0 %, 50 %, and 100 % of full scale
Output	4 mA to 20 mA, two-wire
Resolution	Infinite

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-43 °C to 93 °C [-45 °F to 200 °F]
Temperature, compensating	-34 °C to 82 °C [-30 °F to 180 °F]
Temperature effect, zero	0.018 % full scale/°C [0.01 % full scale/°F]
Temperature effect, span	0.018 % reading/°C [0.01 % reading/°F]
Temperature effect, sealing	Hermetically sealed IP68/NEMA 6P

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Supply voltage	9 Vdc to 28 Vdc
Insulation resistance	>100 MOhm @ 50 Vdc
Max. loop resistance	950 ohm @ 28 V decreasing linearly to 0 ohm @ 9 V
Circuit protection	Reverse polarity protection of supply leads
RFI/EMI protection	Noise immunity from 5000 Hz to 1 GHz
Frequency response	Customer specified and factory installed filter for frequency response of min. 10 Hz to max. of 2500 Hz
Zero and span adjustment	Field adjustable by removing connector
Electrical termination (std)	Standard electrical termination: 4-pin MS3102 connector designed in stainless steel specifically for the oil and gas industry; offers full hermetic sealing and direct "Glenair" connector compatibility

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Media	Corrosive and abrasive service, Inconel X-750
Overload, safe	150 % rated full scale pressure or limit of wing union 1502 fitting
Overload, burst	250 % rated pressure or limit of wing union 1502 fitting
Pressure port	1502 wing union, 51 mm [2 in] pipe, male sub end
Wetted parts material	Inconel X-750
Weight	2722 g [6 lb]
Case material	316L stainless steel (labels are welded stainless steel with embossed characters)

RANGE CODES

Range Code	Available ranges
DR	0 psi to 5000 psi
DS	0 psi to 6000 psi
DV	0 psi to 10000 psi
EJ	0 psi to 15000 psi
EL	0 psi to 20000 psi ³

WIRING CODES

	Amp (NS), 3-cond, 4 pin, ground
A	No connection
B	(+) Output
C	(+) Supply
D	Case ground


Wing Union Pressure Transmitter

INTERNAL AMPLIFIERS

Amplifier specifications	Intrinsically safe amp: Option 2n(2N)***
Output signal	4 mA to 20 mA
Input power (voltage)	9 Vdc to 28 Vdc
Input power (current)	4 mA to 24 mA
Frequency response (amp)	2500 Hz
Power supply rejection	60 db
Operating temperature	-43 °C to 93 °C [-45 °F to 200 °F]
Reverse voltage protection	Yes
Short circuit protection	Yes
Wiring code: connector (std)	A No connection B (+) Output C (+) Supply D Case ground

*** See Honeywell's Web site for the most up-to-date information regarding intrinsically safe approvals, ref. #008-0547-00.

MOUNTING DIMENSIONS

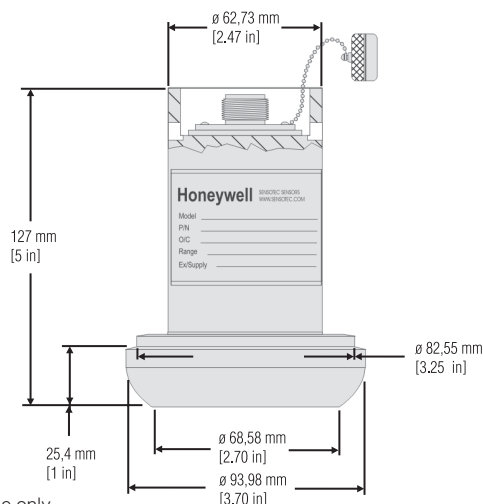

OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.
Pressure ranges ³	0 psi to 5000 psi; 0 psi to 6000 psi; 0 psi to 10000 psi; 0 psi to 15000 psi; 0 psi to 20000 psi
Temperature compensation	-34 °C to 82 °C [-30 °F to 180 °F]
Internal amplifiers	2n(2N). 4 mA to 20 mA, two-wire output; intrinsically safe
Electrical termination	Standard electrical termination: 4-pin MS3102 connector designed in stainless steel specifically for the oil and gas industry; offers full hermetic sealing and direct "Glenair" connector compatibility 6a. Bendix PTIH-10-6P (or equivalent) 6 pin (max. 121 °C [250 °F]) 6j. 1/2 in NPT conduit Call Factory: Jupiter connection Call Factory: Other connection(s) - By request
Shunt calibration	3d. Remote buffered shunt calibration
Special calibration ²	9a. 10 point (5 up/5 down) 20 % increments @ 21 °C [70 °F] 9b. 20 point (10 up/10 down) 10 % increments @ 21 °C [70 °F]
Wetted diaphragm	10e. Inconel X-750
Zero and span adjustment	14b. Top access to pots
Temperature sensing options	45c. RTD output direct to connector. Gives temperature as a resistance reading. Intrinsically safe 45d. RTD with temperature as a 4 mA to 20 mA output. Not intrinsically safe.

Model 425

Wing Union Pressure Transmitter

NOTES

1. Accuracies stated are expected for best fit straight line for all errors including linearity, hysteresis and non-repeatability thru zero.
2. Availability varies with range.
3. Working pressure and approval limited to 15000 psi. Amplifier will allow overpressure readings to 20000 psi.

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office. To learn more about Honeywell's test and measurement products, call **+1-614-850-5000**, visit **www.honeywell.com/sensotec**, or e-mail inquiries to **info.tm@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
www.honeywell.com

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

WARNING **PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING **MISUSE OF DOCUMENTATION**

- The information presented in this datasheet is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Honeywell