


1140 Potted Single Point, Stainless Steel



Picture is a representation of actual product

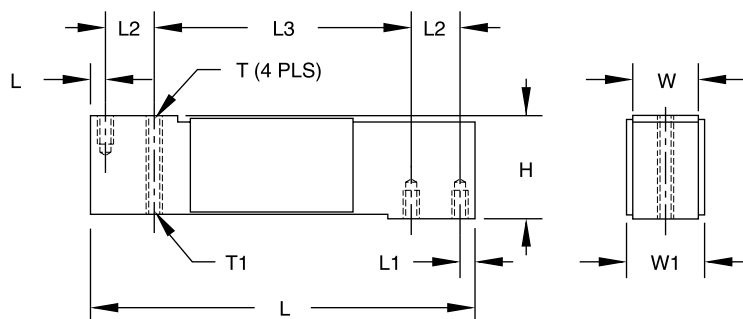

RATED CAPACITY	DIMENSIONS								
	H	L	L1	L2	L3	T	T1	W	W1
kg/mm									
15-150	40.0	150.0	5.95	19.1	100.0	1/4-20 UNC X 10 DP	1/4-28 UNF X 10 DP	25.4	29.4
lb/inches									
33.1-330.7	1.57	5.91	.23	.75	3.94	1/4-20 UNC X 0.39 DP	1/4-28 UNF X 0.39 DP	1.00	1.16

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V	Seal Type:	Environmentally-sealed
Bridge Resistance:	350 ohms, nominal	Cable Length:	3.1 m/10'
Material/Finish:	Stainless steel	Cable Color Code:	Green.....+ Excitation Black.....- Excitation Blue.....+ Sense Brown.....- Sense Red.....+ Signal White.....- Signal
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C	Platform size:	15.75" x 15.75"
Safe Overload:	200% at center loading point, full scale	Warranty:	1-year limited warranty
Rated Excitation:	10V DC (15V maximum)		
Total Error:	0.02% Full scale		
Insulation Resistance:	5000 megohms		
Deflection at Capacity:	15-150 kg ≤ .4 mm/.015"		

1140 ORDER INFORMATION

Load Rating	Part #	Price
15 kg (33.1 lb)	17451	\$320.00
30 kg (66.1 lb)	17452	\$320.00
50 kg (110.2 lb)	17468	\$320.00
75 kg (165.4 lb)	17485	\$320.00
100 kg (220.5 lb)	17453	\$320.00
150 kg (330.7 lb)	36466	\$320.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 161) RL1140