


1240 Single Point, Stainless Steel



Picture is a representation of actual product

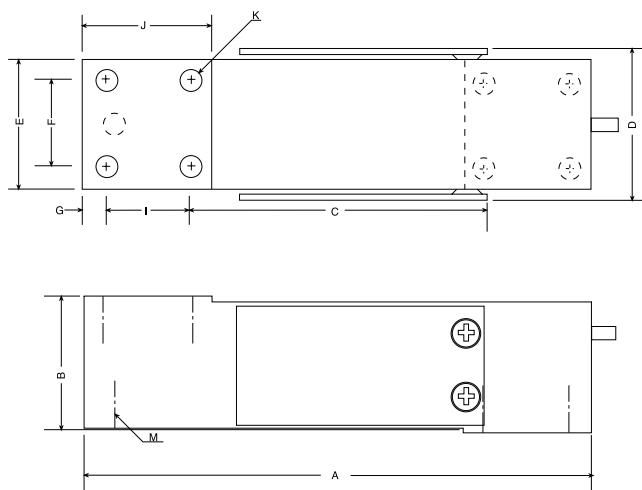

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	I	J	K	M
kg/mm 200-250	150.1	39.9	86.6	43.4	38.1	25.4	6.35	25.4	38.1	1/4-20 UNC x 13 DP	1/4-28 UNF x 10 DP
lb/inches 441-551.3	5.91	1.57	3.41	1.71	1.50	1.00	.25	1.00	1.50	1/4-20 UNC x 0.51 DP	1/4-28 UNF x 0.39 DP

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms
Material/Finish: Stainless steel
Temperature: Compensated range
0°F to 150°F/-18°C to 65°C
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (15V maximum)
Total Error: 0.02%
Insulation Resistance: 2000 ohms
Deflection at Capacity: 200-250 kg = .015"/.4mm
Seal Type: Environmentally sealed

Cable Length: 3.1 m/10'
Cable Color Code: Green.....+ Excitation
Black.....- Excitation
Blue.....+ Sense
Brown.....- Sense
Red.....+ Signal
White.....- Signal
Platform Size: 15.5" x 15.5"
Warranty: 1-year limited warranty

1240 ORDER INFORMATION

Load Rating	Part #	Price
200 kg (441 lb)	47880.....	\$350.00
250 kg (551.3 lb)	47881.....	\$350.00