

Interchangeable Products

WEIGHTRONIX

220**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

220 page 84**Specifications****Full Scale Output:**

2 mV/V

Output Resistance:1025 (± 20) ohms**Input Resistance:**1065 (± 60) ohms**Material/Finish:**

Stainless steel

Temperature:

Compensated range

14° to 104°F (-10°C to 40°C)

Operating range

-40°F to 150°F (-40°C to 65°C)

Safe Overload:

150% at center loading point, full scale

Rated Excitation:

5-10 VDC (15 V maximum)

Total Error:

0.020% full scale

Insulation Resistance:

2,000 megohms

Deflection at Capacity:

< 0.5 mm at full scale

Seal Type:

Hermetically sealed, IP68

Cable Length:

5 m (5,000 kg)

10 m (10 kg-20,000 kg)

20 m (30,000 kg)

Cable Diameter:

0.220 polyurethane jacket

Cable Color Code:

Blue+ Excitation

Black.....- Excitation

Green.....+ Sense

Gray- Sense

White+ Signal

Red- Signal

Warranty:


One-year limited warranty

Approvals:Available
upon
request**Dimensions***Picture is a representation of actual product*


Rated Capacity	A	B	C	D	E	H
kg/mm						
5,000 kg	80.00	19.00	70.00	20.00	33.4	30.00
10,000 kg	92.00	28.00	80.00	14.6	33.4	33.00
20,000 kg- 30,000 kg	110.00	29.00	101.5	26.3	39.00	50.00

Order Information

Load Rating	Part#	Est. Weight	Price
5,000 kg	65854	3 lb	Consult
10,000 kg	65855	5 lb	Consult
20,000 kg	65856	8 lb	Consult
30,000 kg	65857	8 lb	Consult

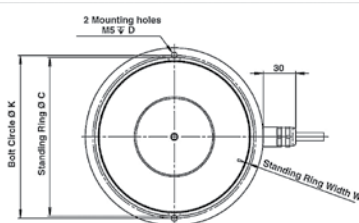

20t, 30t, 50t



5t, 10t

