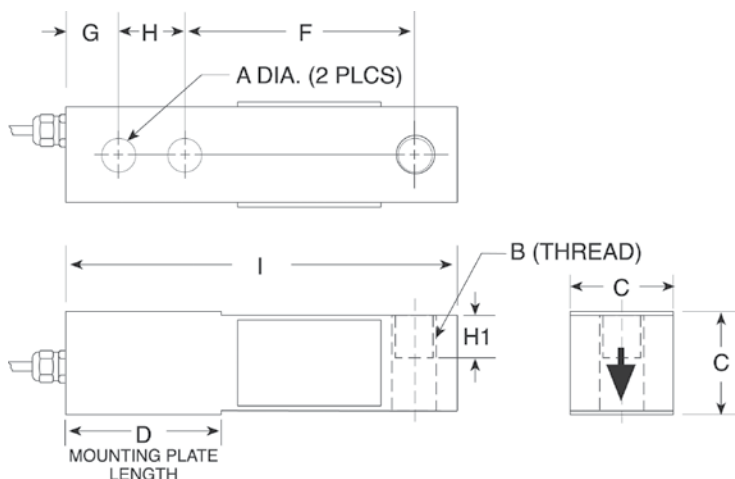


**Dimensions***Picture is a representation of actual product*

Rated Capacity	A	B	C	D	F	G	H	H1	I
lb/in									
1,000-4,000	0.53	1/2-20 UNF	1.24	2.25	3.00	0.63	1.00	0.60	5.12
5,000-10,000	0.78	3/4-16 UNF-2B	1.49	3.00	3.75	0.75	1.50	0.75	6.75
kg/mm									
453.6-1,814.4	13.5	1/2-20 UNF	30.5	33.9	76.2	16.00	25.4	15.2	130.00
2,268.0-4,535.9	19.8	3/4-16 UNF-2B	37.8	76.2	95.3	19.1	35.6	19.1	171.5

Order Information

Load Rating	Part #	Est. Weight	Price
Alloy Steel			
1,000 lb	29903	3 lb	Consult
2,500 lb	29904	3 lb	Consult
4,000 lb	29905	3 lb	Consult
5,000 lb	29906	4 lb	Consult
10,000 lb	29907	4 lb	Consult
Stainless Steel			
1,000 lb	47871	3 lb	Consult
2,500 lb	47872	3 lb	Consult
4,000 lb	47873	3 lb	Consult
5,000 lb	47874	4 lb	Consult
10,000 lb	47875	4 lb	Consult

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RL30000 page 124

RICE LAKE WEIGHING SYSTEMS

RL39123* page 127

VPG REVER®

5123 page 278

VPG REVER

9123* page 279**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

RL50210 TA page 52

RICE LAKE WEIGHING SYSTEMS

RL1800 Series page 62

*Stainless steel

Specifications**Full Scale Output:**

3.0 mV/V

Output Resistance:

351 (± 5) ohms

Input Resistance:

385 (± 10) ohms

Material/Finish:

High-alloy steel, nickel plated

Temperature:

Operating range

14°F to 104°F (-10°C to 40°C)

Operating range

-40°F to 150°F (-40°C to 65°C)

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5-10 VDC (15 V maximum)

Total Error:

0.03% full scale

Insulation Resistance:

2,000 megohms

Deflection at Capacity:

1,000 lb-10,000 lb=0.015 in (.4 mm)

Seal Type:

Environmentally sealed, IP67

Cable Length:

10 ft (3.1 m)

Cable Diameter:

0.200 PVC jacket

Cable Color Code:

Red+ Excitation
 Black.....- Excitation
 Blue+ Sense
 Brown- Sense
 Green+ Signal
 White- Signal

Warranty:

One-year limited warranty

Approvals:

Available Available
 upon upon
 request request