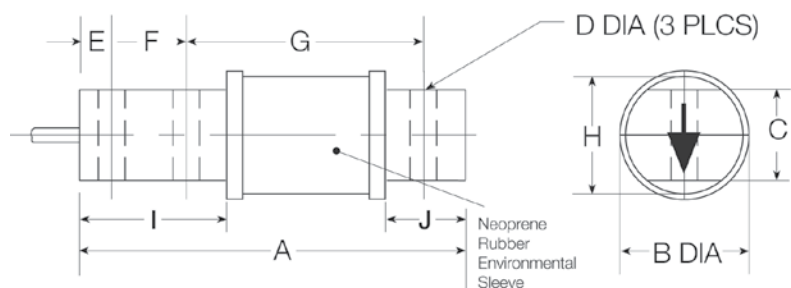


**Dimensions***Picture is a representation of actual product*

Rated Capacity	A	B	C	D	E	F	G	H	I	J
lb/in										
25-500	2.81	1.30	0.62	0.26	0.25	0.50	1.81	1.00	1.00	0.50
kg/mm										
11.3-226.8	71.4	33.00	15.8	6.6	6.4	12.7	46.00	25.4	25.4	12.7

Order Information

Load Rating		Part#	Est. Weight	Price
25 lb	11.3 kg	17369	2 lb	Consult
50 lb	22.7 kg	17370	2 lb	Consult
75 lb	34.0 kg	17371	2 lb	Consult
100 lb	45.4 kg	17372	2 lb	Consult
150 lb	68.0 kg	17373	2 lb	Consult
250 lb	113.4 kg	17374	2 lb	Consult
500 lb	226.8 kg	17375	2 lb	Consult

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RL50210 page 139

VPG REVERE®

5503 —

ARTECH®

50210 —**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

RL50210 page 139**Specifications****Full Scale Output:**

3.0 mV/V

Output Resistance:

349-355 ohms

Input Resistance:

380-450 ohms

Material/Finish:

High-alloy steel, nickel plated

Temperature:Operating range
-40° F to 150° F (-40° C to 65° C)**Manufacturer Model Number:**

60040

Safe Overload:

150% full scale

Rated Excitation:

5-10 VDC (15 V maximum)

Nonlinearity:

0.03% full scale

Hysteresis:

0.02% full scale

Insulation Resistance:

5,000 megohms

Deflection at Capacity:25 lb-50 lb=0.008 in (20 mm)
75 lb-100 lb=0.010 in (25 mm)
150 lb=0.012 in (30 mm)
250 lb=0.016 in (41 mm)
500 lb=0.025 in (64 mm)**Seal Type:**Environmentally sealed with a
neoprene sleeve, IP65**Cable Length:**

20 ft (6.1 m)

Cable Diameter:

0.200 polyurethane jacket

Cable Color Code:Red+ Excitation
Black.....- Excitation
Green+ Signal
White- Signal**Warranty:**

One-year limited warranty

Approvals: