

65016WH

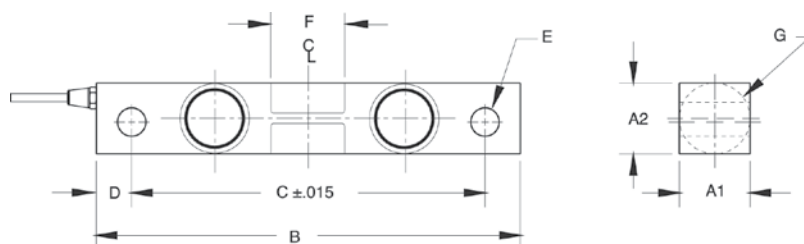
Stainless Steel, Hermetically Sealed, IP68

**Dimensions***Picture is a representation of actual product*

Rated Capacity	A1	A2	B	C	D	E	F	G	CONDUIT ADAPTER
lb/in									
1,000-5,000	1.22	1.22	7.50	6.25	0.62	0.50	1.12	1.25	1/2-14 NPT
10,000-25,000	1.44	1.94	8.75	7.50	0.62	0.81	1.62	1.99	1/2-14 NPT
kg/mm									
453.6-2,268.0	31.0	31.0	190.5	158.8	15.7	12.7	28.4	31.8	1/2-14 NPT
4,535.9-11,339.8	36.6	49.3	222.3	190.5	15.7	20.6	41.1	50.5	1/2-14 NPT

Order Information

Load Rating		Part #	Est. Weight	Price
1,000 lb	453.6 kg	65827	4 lb	Consult
1,500 lb	680.4 kg	65828	4 lb	Consult
2,000 lb	907.2 kg	65829	4 lb	Consult
2,500 lb	1,134.0 kg	65830	4 lb	Consult
5,000 lb	2,268.0 kg	65831	4 lb	Consult
10,000 lb	4,535.9 kg	65832	7 lb	Consult
15,000 lb	6,803.9 kg	65833	7 lb	Consult
20,000 lb	9,071.9 kg	65834	7 lb	Consult
25,000 lb	11,339.8 kg	65835	7 lb	Consult

**Interchangeable Products**

RICE LAKE WEIGHING SYSTEMS

RL75016 WHE page 152

RICE LAKE WEIGHING SYSTEMS

RL75016SS-W* page 151

VPG SENSORTRONICS®

65016W* page 325**Weigh Module Available**

RICE LAKE WEIGHING SYSTEMS

RL1600 Series page 92 and page 94

*Welded-seal

Specifications**Full Scale Output:**

3.0 mV/V nominal

Output Resistance:

699-707 ohms

Input Resistance:

686-714 ohms

Material/Finish:

Stainless steel

Temperature:Operating range
-40° F to 150° F (-40° C to 65° C)**Manufacturer Model Number:**

65016WXX-0104WH

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

5-10 VDC (15 V maximum)

Nonlinearity:

0.03% full scale

Hysteresis:

0.02% full scale

Insulation Resistance:

5,000 megohms

Seal Type:

Hermetically sealed, IP68

Cable Length:

25 ft (7.6 m)

Cable Diameter:

0.200 polyurethane jacket

Cable Color Code:

Red+ Excitation
 Black.....- Excitation
 Green+ Signal
 White- Signal

Warranty:

One-year limited warranty

Approvals: