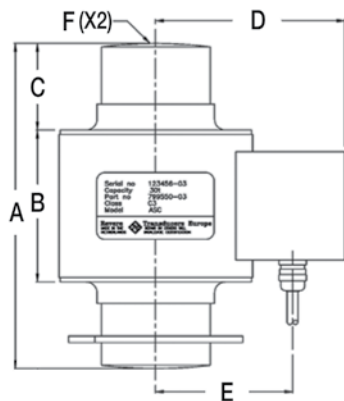


**Dimensions***Picture is a representation of actual product*

Rated Capacity	A	B	C	D	E	F
T/in						
30-50	5.91	2.75	1.57	3.43	69.1	R7.87
T/mm						
30-50	150	70	40	87.1	69.1	R200

**Order Information**

Load Rating	Part #	Est. Weight	Price
<b>NTEP Certified</b>			
30T	132564	5 lb	Consult
40T	128262	5 lb	Consult
50T	132565	5 lb	Consult
<b>OIML</b>			
30T	151312	5 lb	Consult
40T	151313	5 lb	Consult
50T	151314	5 lb	Consult
<b>Load Cup Set (Upper and Lower)</b>			
-	160452	6 lb	Consult

**Specifications****Full Scale Output:**

2.00 (± 0.02) mV/V

**Output Resistance:**

700 (± 35) ohms

**Input Resistance:**

700 (± 35) ohms

**Material/Finish:**

Stainless steel

**Temperature:**

Compensated range  
14°F to 104°F (-10°C to 40°C)  
Operating range  
-40°F to 150°F (-40°C to 65°C)

**Manufacturer Model Number:**

ASC-B10-XX-60P5R

**Safe Overload:**

150% full scale

**Rated Excitation:**

5 VDC to 20 VDC

**Combined Error:**

0.02% full scale

**Insulation Resistance:**

5,000 megohms

**Seal Type:**

Hermetically sealed, IP68

**Cable Length:**

OIML: 15 m  
NTEP Certified: 60 ft

**Cable Diameter:**

0.295 in polyurethane jacket

**Cable Color Code:**

Green ..... + Excitation  
Black ..... - Excitation  
White ..... + Signal  
Red ..... - Signal  
Transparent ..... Shield

**Warranty:**

One-year limited warranty

**Approvals:**