


363 S-Beam, Alloy Steel

NTEP 1:10,000 Class IIIIL Single Cell, IP67



Picture is a representation of actual product

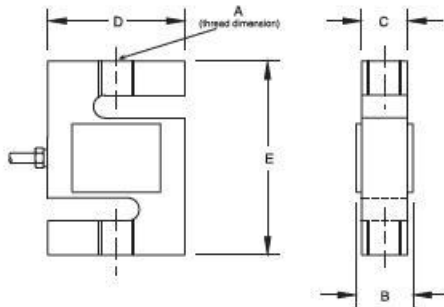

SPECIFICATIONS:

Full Scale Output:	3.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Manufacturer	363-B10-XX-20P1 (NTEP)
Model Number:	
Safe Overload:	150% Full Scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.02% Full Scale
Non-repeatability:	0.01% Full Scale
Insulation Resistance:	5000 megohms
Seal Type:	Environmentally sealed, IP67
Cable Length:	20'±6.1 m
Cable Color Code:	Red..... + Excitation Black..... - Excitation Green..... + Signal White..... - Signal Orange..... - Shield
Warranty:	One-year limited warranty
Approvals:	

DIMENSIONS

Rated Capacity	A	B	C	D	E
lb/inches					
50-300	1/4-28 UNF-2B	.65	.50	2.00	2.50
500-1500	1/2-20 UNF-2B	.90	.75	2.00	2.50
2000	1/2-20 UNF-2B	1.15	1.00	2.00	2.50
3000	1/2-20 UNF-2B	1.15	1.00	3.00	4.00
5000-10,000	3/4-16 UNF-2B	1.15	1.00	3.00	4.00
kg/mm					
22.7-136.1	1/4-28 UNF-2B	16.5	12.7	50.8	63.5
226.8-680.4	1/2-20 UNF-2B	22.9	19.1	50.8	63.5
907.2	1/2-20 UNF-2B	29.2	25.4	50.8	63.5
1360.8	1/2-20 UNF-2B	29.2	25.4	76.2	101.6
2268.0-4535.9	3/4-16 UNF-2B	29.2	25.4	76.2	101.6

363 Order Information

Load Rating	Part #
NTEP 1:10,000	
100 lb (45.4 kg)	21463
200 lb (90.7 kg)	21464
300 lb (136.1 kg)	21465
500 lb (226.8 kg)	21466
750 lb (340.2 kg)	21467
1000 lb (453.6 kg)	21468
1500 lb (680.4 kg)	21469
2000 lb (907.2 kg)	21470
3000 lb (1360.8 kg)	21471
5000 lb (2268.0 kg)	21472
10,000 lb (4535.9 kg)	21473
Non-NTEP	
50 lb (22.7 kg)	17043

Interchangeable Products

Manufacturer	Model	Page #
Rice Lake Weighing Systems	RL20000	102

Weigh Module Available

Model	Page #
ITCM Isolated Tension Cell Mount	350