



Pressure, Level & Temperature Transmitters & Transducers

2770 Long Road, Grand Island, NY 14072 USA

Tel. (716) 773-9300 • Fax (716) 773-5019

sales@gp50.com • www.gp50.com

Model 540 Series

FLUSH MOUNT CANBUS PRESSURE TRANSMITTER



FEATURES:

- Flush sensor resists plugging
- All welded, rugged construction
- No Zero installation effect
- Compact design

CANBus J1939 Protocol offers:

- Adjustable Bit Rate
- Adjustable Message Output Rate
- System Output Re-Zero
- Digital Shunt
- Adjustable Message Addresses
- Custom Message Streaming
- High Stability option provides; Higher Resolution, Noise Reduction, Better Thermal Performance & Long Term Stability

PRESSURE RANGES: (Consult factory for higher ranges)

- 0-50 Thru 0-1,000 PSI

WIRING: 540

A/1	+ Excitation
B/2	- Excitation
C/3	Case Ground
D/4	Can High
E/5	Can Low
F/6	N/C

Accuracy: (Static Error Band)

- Series B: +/- 0.5 % FSO
- Series C: +/- 0.25 % FSO
- Series D: +/- 0.1 % FSO
- Series E: +/- 0.05 % FSO

Temperature Compensation: (Expanded & Improved Options Available)

- Compensated Range: 30° F -185° F
- Operating Range: Process: -40° F to +250° F
Ambient: -40° F to +185° F
- Storage Range: -65° F to +250° F
- Temperature Effect on Zero: +/-0.5 % FSO/100° F
- Temperature Effect on Span: +/-0.5 % FSO/100° F

Electricals:

- Standard Excitation Voltage: 5.6 -18 VDC
- Optional Expanded Excitation Voltage: 4.5-37 VDC
- Current Draw: 40 mA
- Output: CANBus J1939 (Consult Factory for Specifics)
- Standard Resolution: 16 Bit
- Optional Improved Resolution: 18 Bit
- Standard Connection: 1/2" NPT Male Conduit with 36" leads
- 4 Wire Device: +/- Signal & +/- Power, Case Ground

Mechanicals:

- Proof Pressure: 2x FSO (Optional 5 X)
- Burst Pressure: 5x FSO
- Case Materials: 300 series SST
- Wetted parts: 17- 4PH SSTT
- Process Connection: Flush 1/2" NPT Male

Protocol: (Consult Factory for More Detail)

- Standard Can protocol - 11 bit CAN Identifiers
- Optional Extended Can 2.0B -29 bit CAN Identifiers
- Standard messaging: Pressure, Temperature & mV/V Sensor
Up to four messages can be streamed

A5SL-540.00



Pressure, Level & Temperature Transmitters & Transducers


2770 Long Road, Grand Island, NY 14072 USA

Tel. (716) 773-9300 • Fax (716) 773-5019

sales@gp50.com • www.gp50.com

Model 540 Series FLUSH MOUNT CANBUS PRESSURE TRANSMITTER

Some options will affect dimensions. Consult factory if important.

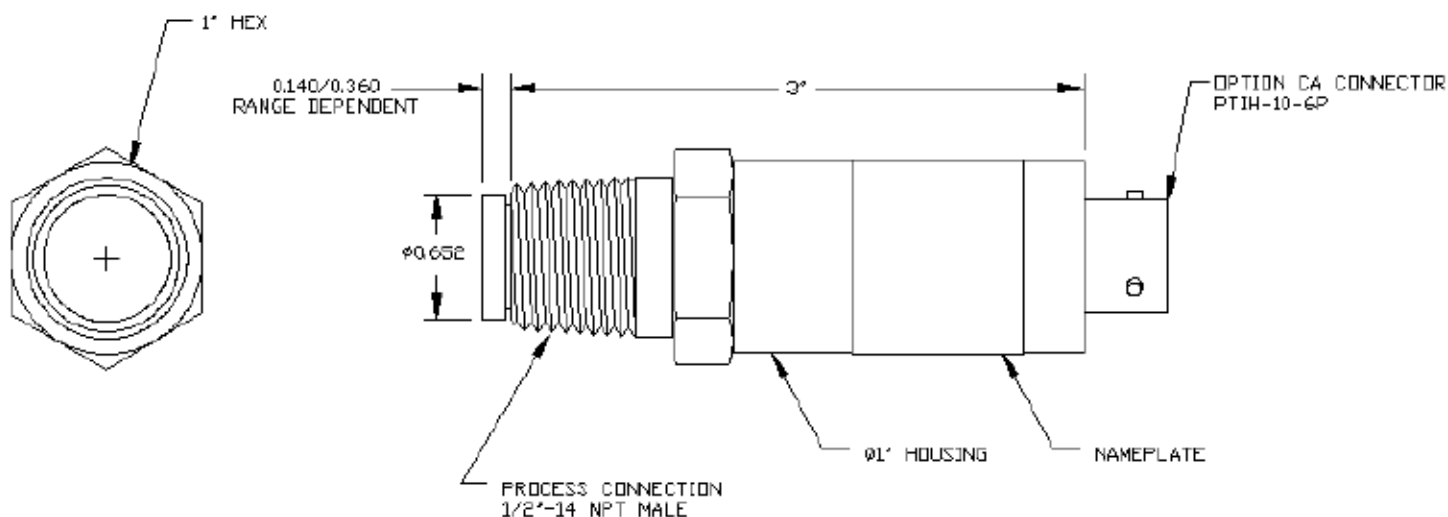

Typical configurations (Consult Factory for More Options)

MODEL

540 CANBus (J1939)

STATIC ACCURACY

B +/- 0.5 % FSO D +/- 0.1 % FSO
C +/- 0.25 % FSO E +/- 0.05 % FSO

PRESSURE RANGE (PSI)

PV 0-15	RE 0-250
PX 0-75	RF 0-300
PZ 0-100	RH 0-500
RB 0-150	RK 0-750
RD 0-200	RM 0-1,000

PRESSURE TYPE

2 Gauge
3 Absolute
6 Sealed Gauge

OPTIONS (Other Options Available, Consult Factory)

ELECTRICAL CONNECTOR OR CABLE

CA PTIH-10-6P (Mate PT06E-10-6S [SR], not included)
CF 1/2" NPT (M) Thread with 3FT leads
DK 4 Pin SST Glenair Equal

PRESSURE PORTS

IM 1/2" NPT Male (Flush)

NOTE:

Specifications reflect standard product, improved performance / mechanical options available.

Modifications may alter specs, consult factory for more information.