

▶ BE40

▶ **DOUBLE-ENDED BEAM**

▶ **ALLOY STEEL**
NTEP 1:10,000 Class ■ Multiple Cell

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



BE40 ORDER INFORMATION

DISCOUNT C


SUGGESTED LIST PRICE

25K, 40K, 50K SE, 60K SE, 75K SE
50K, 60K, 75K
100K, 125K

INTERCHANGEABLE PRODUCTS

Rice Lake Weighing Systems.....	RL75040A
Sensortronics.....	65040A
Celtron.....	DLB
Thurman.....	TSC840
Artech.....	80310
Totalcomp.....	TDE40
Revere.....	9903
Revere.....	9323 50Kse -75Kse
CMI.....	CMI 60K
NV Technologies.....	BLC-1-WP 50Kse

Main Dimensions and Accessories

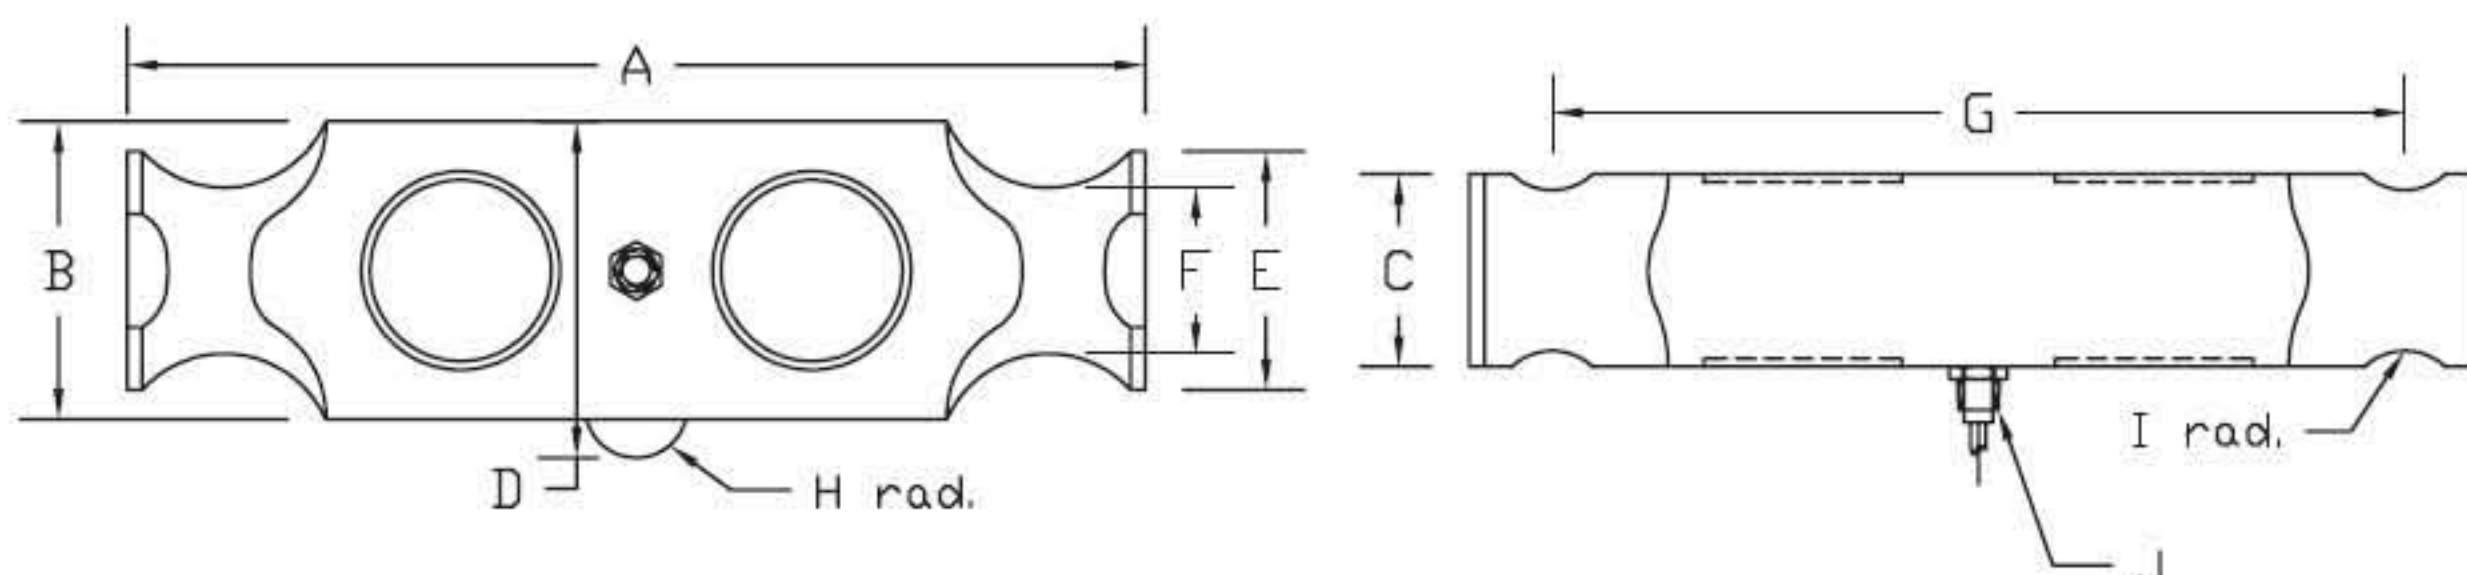

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	H	I	J	
25K-75KSE	8.25	2.44	1.94	2.97	2.00	1.63	7.25	0.50	0.50	1/4-18NPT	
50K-75K	11.50	2.94	1.94	3.47	2.20	1.70	10.00	1.00	0.75	1/2-14NPT	
100K-125K	14.50	3.86	2.90	4.68	3.20	2.44	12.50	1.50	1.00	1/2-14NPT	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	3.00	Bridge Resistance	700
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +40°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	50' Braided Shield
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Environmentally-Sealed, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	