

▶ CI-743

▶ SINGLE-ENDED BEAM

▶ STAINLESS STEEL
Welded Seal, IP67

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



CI-743 ORDER INFORMATION DISCOUNT C SUGGESTED LIST PRICE

1K, 3K, 5K
10K, 20K


INTERCHANGEABLE PRODUCTS

Toledo.....1K.....	13136900C
Toledo.....3K.....	13079300C
Toledo.....5K.....	13078900C
Toledo.....10K.....	13078400C
Toledo.....20K.....	13077500C
Masstron@.....1K.....	ML4311
Masstron@.....3K.....	ML4331
Masstron@.....5K.....	ML4350
Masstron@.....10K.....	ML4410
Masstron@.....20K.....	ML4420
Rice Lake.....	RLSB2L
TotalComp.....	TB743

ACCESSORIES DISCOUNT G SUGGESTED LIST PRICE

Stock # 655 & 655A Rocker Pin (Dog Bone Style) 1K - 5K
Stock # 662 Rocker Pin (Dog Bone Style) 10K \$

Main Dimensions and Accessories

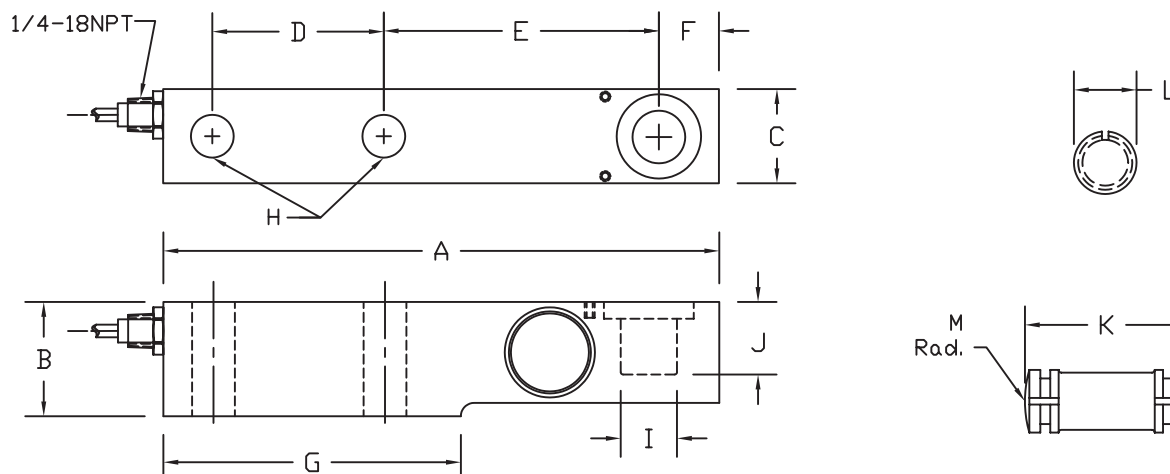

STOCK# 655 & 662

RATED CAPACITY	DIMENSIONS												
	A	B	C	D	E	F	G	H	I	J	K	L	M
1K-5K	8.00	1.70	1.44	2.50	3.88	0.88	3.75	0.52	0.62	1.19	-	-	-
10K	9.25	2.06	1.88	2.62	4.88	0.88	4.31	0.78	0.88	1.19	-	-	-
20K	11.00	2.62	2.38	3.25	5.50	1.25	5.25	1.06	1.25	0.82	-	-	-
#655	-	-	-	-	-	-	-	-	-	-	1.50	0.59	2.00
#662	-	-	-	-	-	-	-	-	-	-	1.73	0.85	2.00

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Bridge Resistance	350
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	30' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Welded-Seal, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	