

▶ CI-745

▶ SINGLE-ENDED BEAM

▶ STAINLESS STEEL
Welded Seal, IP67

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



CI-745 ORDER INFORMATION

*500 lb, 1K, 1.25K, 2.5K, 4K

5K

10K

*Potted not welded

INTERCHANGEABLE PRODUCTS

Toledo..... TB600363, TB600342, TB600232, TB600364, TB600343

TB600529, 745 mount

TotalComp..... TB745

Rice Lake Weighing Systems..... RL30745

ACCESSORIES


Stock # 655 & 655A Rocker Pin (Dog Bone Style) 1K - 5K

Stock # 662 Rocker Pin (Dog Bone Style) 10K \$

WEIGH MODULE AVAILABLE

COTI..... CI-RTM

Main Dimensions and Accessories

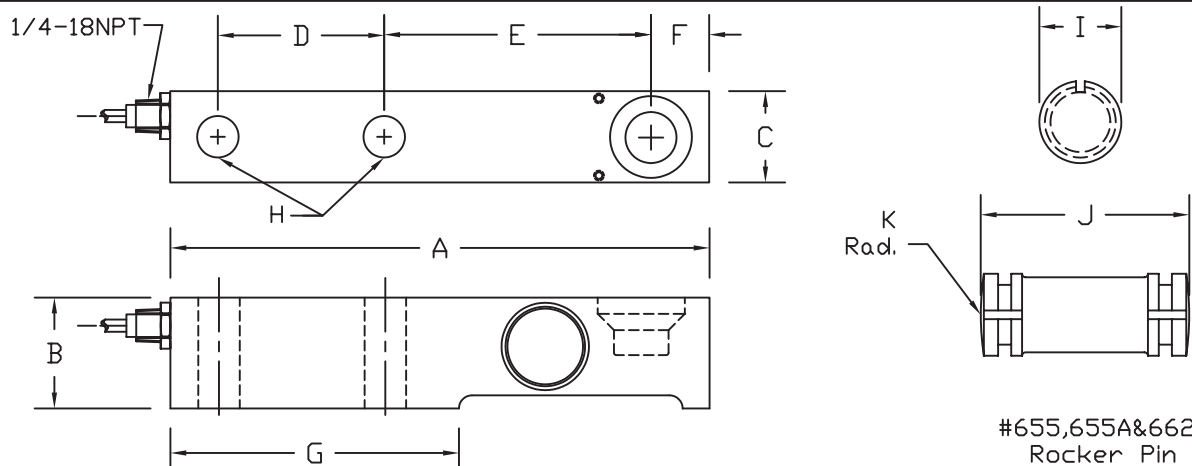

RATED CAPACITY	DIMENSIONS											
	A	B	C	D	E	F	G	H	I	J	K	
500-4K	5.25	1.19	1.21	1.00	3.00	0.61	2.27	0.51	-	-	-	
5K	5.38	1.46	1.46	1.00	3.00	0.73	2.27	0.51	-	-	-	
10K	6.75	1.69	1.69	1.50	3.75	0.75	2.91	0.78	-	-	-	
#655	-	-	-	-	-	-	-	-	0.59	1.5	2.00	
#655A	-	-	-	-	-	-	-	-	0.59	1.25	2.00	
#662	-	-	-	-	-	-	-	-	0.85	1.73	2.00	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Bridge Resistance	350
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	30' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Welded-Seal, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	