

▶ CI-SBF

▶ SINGLE-ENDED BEAM

▶ ALLOY STEEL

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



CI-SBF ORDER INFORMATION

DISCOUNT C

SUGGESTED LIST PRICE

1.5K

2,5K

5K


INTERCHANGEABLE PRODUCTS

Fairbanks 3-48424-X, 3-48363-1A

HBM..... SBF

Rice Lake..... RLSBF

Main Dimensions and Accessories

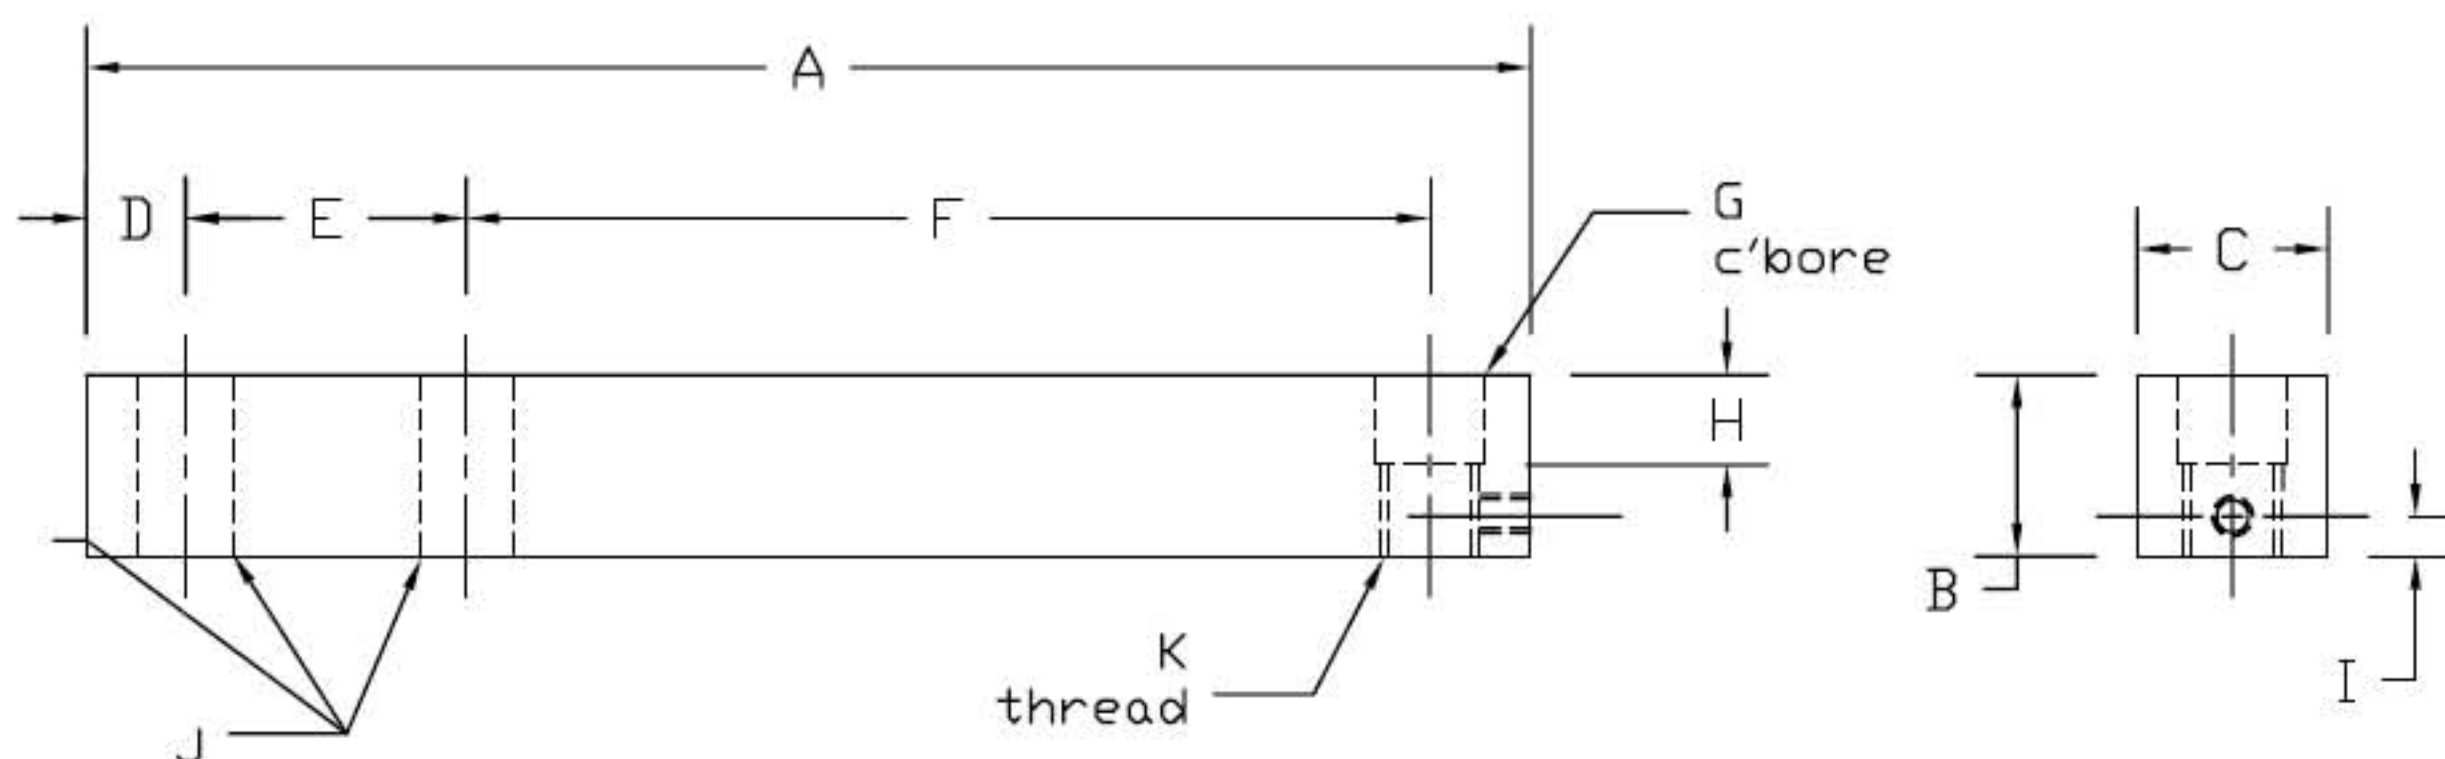

RATED CAPACITY	DIMENSIONS										
	A	B	C	D	E	F	G	H	I	J	K
1.5K-2.5K	9.00	1.15	1.25	0.62	1.75	6.00	0.69	0.50	0.25	0.53	5/8-18UNF
5K	10.00	1.50	1.50	0.75	2.00	6.25	0.94	0.50	0.50	0.78	7/8-14UNF

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	3.00	Bridge Resistance	1000
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	30' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Environmentally-Sealed, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	