



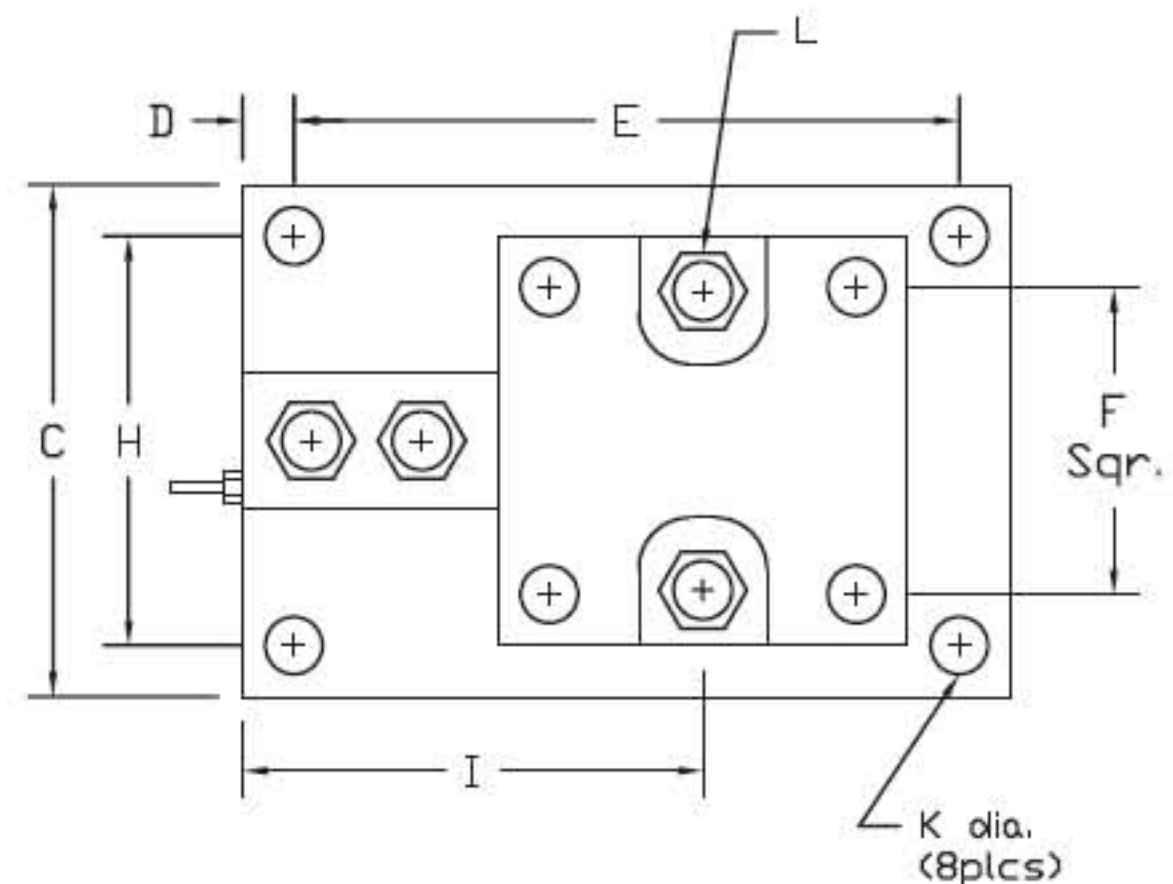

Coti, Inc. - CIRTM Tank Mount Assembly Includes Load Cell

All Stainless Steel construction, this tank mount assembly uses a hermetically sealed beam load cell with a blind load hole that has a flat loading surface. Expansion and contraction due to thermal changes and side load from external forces are handled with a rocker pin mounting. After the side load has been removed the mount will recenter itself using the rocker pin. This mount is unequalled for repeatability. Overload and overlift protection. Integral lateral stops.

Main Dimensions and Accessories

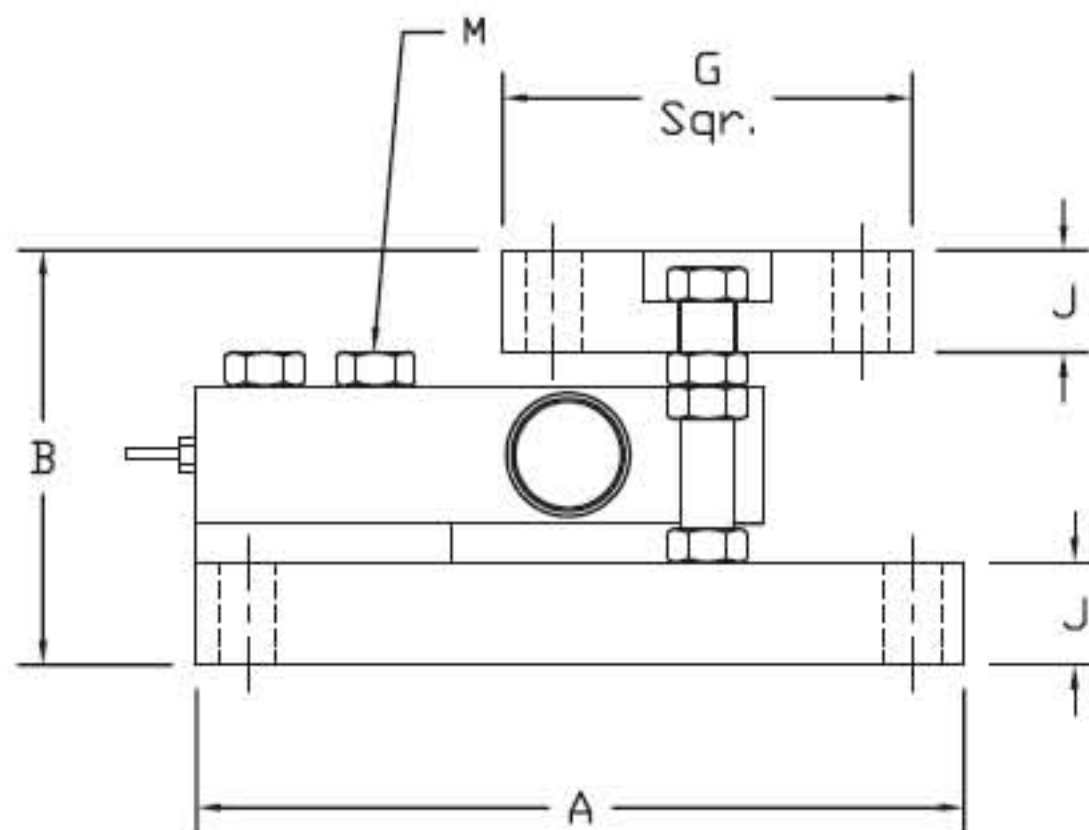

RATED CAPACITY	DIMENSIONS													
	A	B	C	D	E	F	G	H	I	J	K	L	M	
500LB-2.5K	7.50	3.78	5.00	0.50	6.50	3.00	4.00	4.00	4.50	1.00	0.56	1/2-13UNC	1/2-13UNC	
4K	7.50	3.94	5.00	0.50	6.50	3.00	4.00	4.00	4.50	1.00	0.56	1/2-13UNC	1/2-13UNC	
5K	7.50	4.03	5.00	0.50	6.50	3.00	4.00	4.00	4.50	1.00	0.56	1/2-13UNC	1/2-13UNC	
10K	8.50	4.28	5.00	0.50	7.50	3.00	4.00	4.00	6.00	1.00	0.56	1/2-13UNC	3/4-10UNC	

ORDER INFORMATION		DISCOUNT C	SUGGESTED
Part #	Capacity		List Price
CIRTM-500	500 lb		\$ 870.00
CIRTM-1K	1K		\$ 870.00
CIRTM-1.25K	1.25K		\$ 870.00
CIRTM-2.5K	2.5K		\$ 870.00
CIRTM-4K	4K		\$ 870.00
CIRTM-5K	5K		\$ 990.00
CIRTM-10K	10K		\$1090.00