

▶ CP22

▶ **COMPRESSION CANISTER**

▶ **STAINLESS STEEL**
Hermetically Sealed

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



CP22 ORDER INFORMATION DISCOUNT C



SUGGESTED LIST PRICE

5K
10K
15K
20K
50K

INTERCHANGEABLE PRODUCTS

Toledo.....	04966Series
	04967Series
	04968Series
Totalcomp.....	T496

Main Dimensions and Accessories

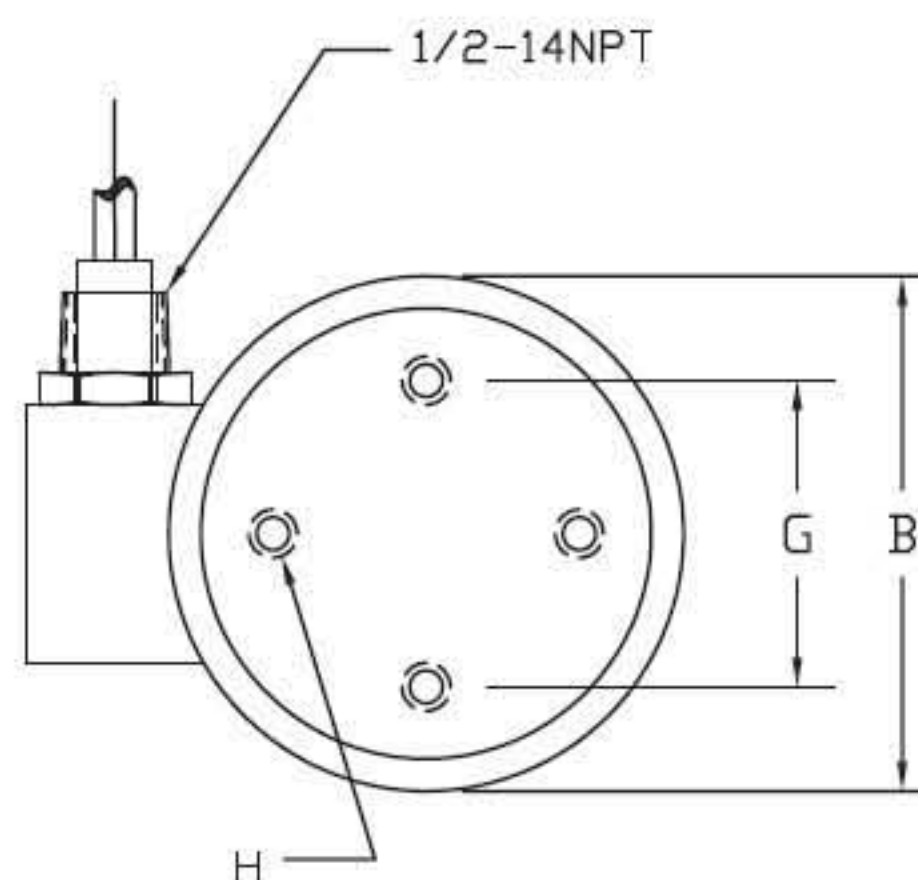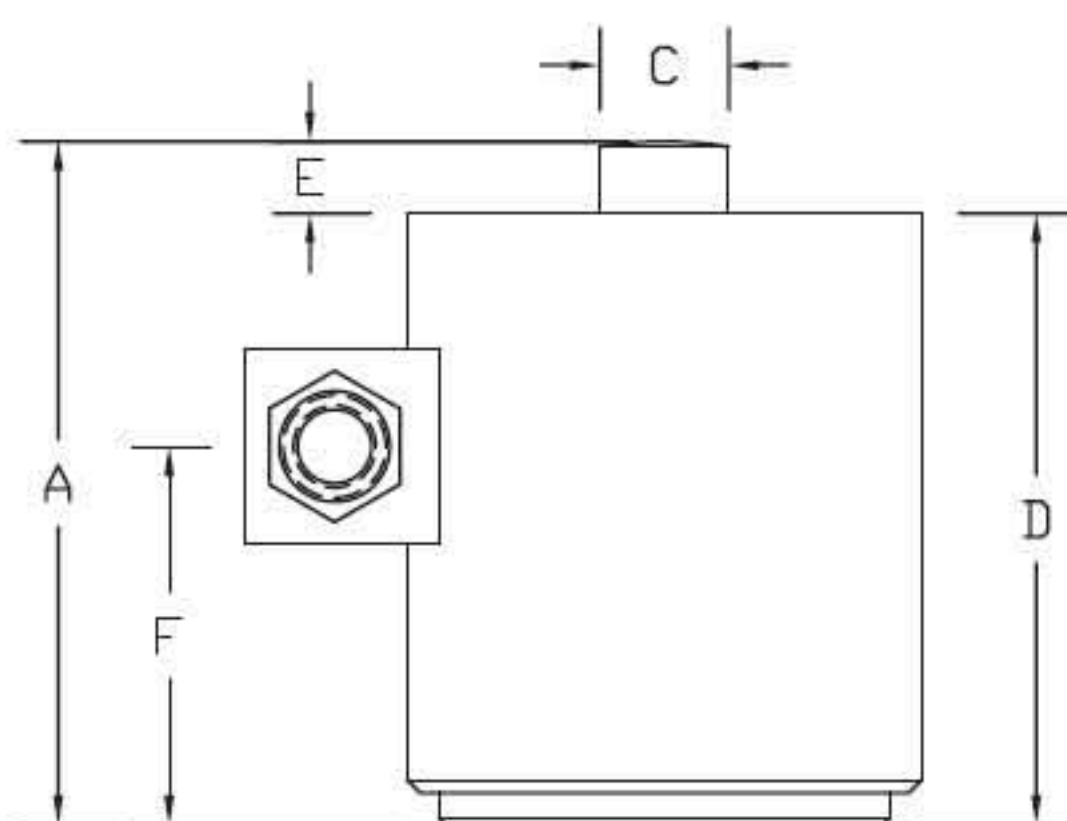

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H	I	
5K-10K	5.31	4.00	1.00	4.71	0.56	2.94	2.38	3/8-24UNF x.62deep		
15K-50K	7.12	4.50	1.25	6.30	0.75	3.26	2.38	3/8-24UNF x.62deep		

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00	Bridge Resistance	240
Nonlinearity	+/- 0.03% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.03% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C Zero
Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	50' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Hermetically Sealed, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	