



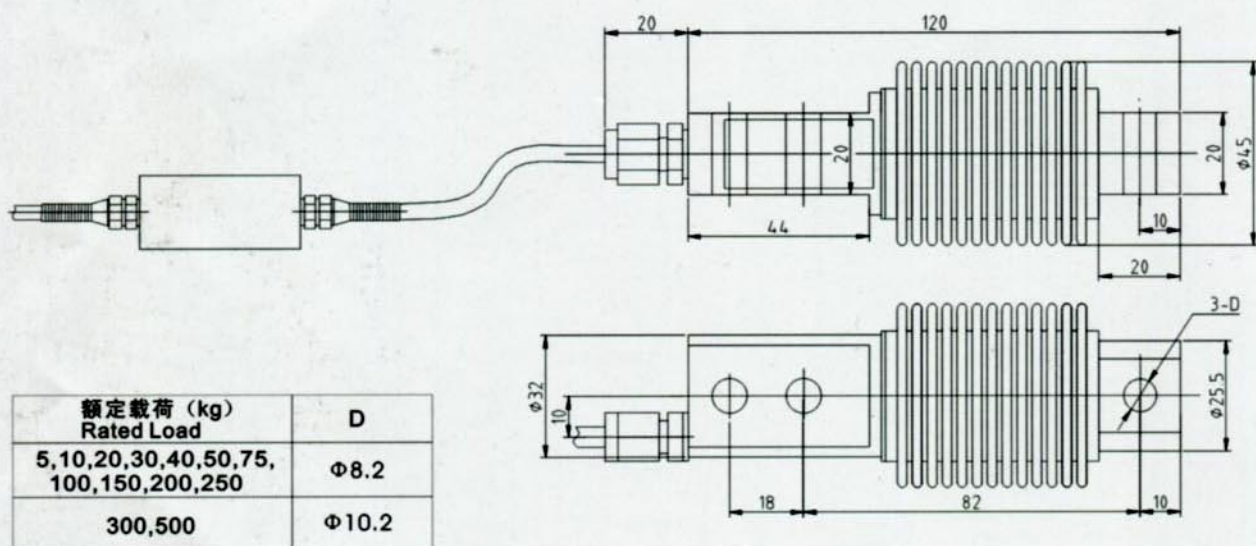

- 1.高精度、高可靠性、稳定性好;
 - 2.安装方便, 互换性好。
- 1.High precision, high reliability,super stability.
 - 2.Easy installation,quite good exchanging capacity.

接线图Wiring Schematic Diagram

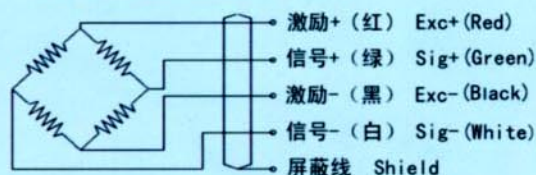

Technical parameter

数字模块分辨率A/D Module Resolution: 60000码
 额定载荷 Rated Load: 5,10,20,30,40,50,75,100,150,200,250,300,500kg
 额定输出 Rated Output: 20000内码
 数据刷新速率 Digital Refurbishing Frequency: 50次/秒
 通讯波特率 Communication BPS: 9600 BPS
 综合精度 Combined Error: $\pm 0.02\% F.S$
 蠕变 (30min) Creep (30min): $\pm 0.02\% F.S$
 温度系数 Temperature Effect: $\pm 0.02\% F.S/10^{\circ}C$

使用温度范围 Operating temp.Range: $-30\sim+70^{\circ}C$
 零点输出 Zero Balance: $\pm 0.1\% F.S$
 安全过载 Safe Overload: 150%F.S
 防护等级 Environmental Protection: IP68
 推荐输入电压 Recommended Excitation: 9~12V DC
 最大输入电压 Maximum Excitation: 20V DC
 最大传输距离 Maxium Transmitting Distance: 1200m