



LA-25-R Series

LVDT Linear Position Sensors

Designed Specifically for Power Generation and Harsh Industrial Environments

Alliance Sensors Group's LA-25-R series of AC-LVDT linear position sensors have been designed for use in steel, aluminum, and paper mills; fluid power systems; and steam or hydro power plants. These heavy duty sensors use a thick wall aluminum housing (stainless steel available) with an open bore and radial terminations that include a cable in a cord grip, a heavy duty industrial connector, or an optional high temperature connector, with which the LA-25-R is a natural choice as a heavy duty replacement for older through-bore LVDTs with a radial connector found in some steam power plants for valve position.

The core of the LA-25-R is enclosed in a 3/8 inch diameter stainless steel connecting rod assembly from which it can never break loose, and which has a male threaded end for connection to a user's workpiece or many optional end pieces available from ASG. Because it has an open bore, an LA-25-R has no shaft seal around the operating rod, but it still has an internal stop for the fully retracted core rod to facilitate mechanical setup.

The LA-25-R series LVDT are ideal for roller gap measurement, head box feedback, control valve shaft position, and hydraulic actuator position feedback. They have the ruggedness to withstand the harsh environments in steam power plants; paper, steel, and aluminum mills; industrial fluid power systems; and hydroelectric plants, and can survive industrial wash downs and equipment cleaning operations. Mated with an Alliance Sensors' model SC-100 DIN-rail-mounting LVDT signal conditioner, an LA-25-R LVDT based system becomes an ideal solution for almost any heavy industrial position measuring applications. For power plant applications, an ASG model S1A is the recommended DIN-rail-mounting LVDT signal conditioner to use with an LA-25-R series LVDT.

Standard Features

- Stock ranges from 3 inches to 15 inches (75 mm to 375 mm) Full Scale
- Works in 3-wire, 4-wire, 5-wire, 6-wire, and ratiometric (A-B/A+B) systems
- 5/16-24 or 8 mm male threaded shaft end
- Core totally enclosed in 3/8 inch (9.5 mm) diameter core extension rod
- Open bore for easy cleanout
- Continuous operation to 250 °F (120 C)
- Environmentally sealed to IEC IP-68

Options

- Stainless steel body
- Alternate termination connectors, including one for 350 °F (175 C) operation
- Mild radiation resistant version for nuclear power plants (30 Mrads for 40 years)
- Mounting hardware including flanges, single hole mounting kits, swivel rod eye ends, ball joints, extension rods, holddown clamps, and tie bars for dual-mounted LVDTs

LA-25-R Series



Electrical Specifications:


Available FS ranges:	0 to 3, 6, 9, 12, or 15 inches (0 to 75, 150, 225, 300, or 375 mm)
Excitation Frequency:	3 kHz nominal
Excitation Voltage:	3 V ACrms nominal
Full Scale Output:	0.9 V ACrms output (nom.) from differentially connected (S1-S2) secondaries (ref: 3 Vrms excitation); sum of secondaries output is constant over range for ratio-metric (S1-S2)/(S1+S2) operation
Linearity Error:	$\leq \pm 0.3\%$ of FSO
Operating Temperature:	-40 to 120 C (-40 to 250 °F)
Temperature Coefficient:	$\leq 0.025\%$ FSO/degree C
Humidity:	95% RH non-condensing
Shock:	1000 g, 11 msec
Vibration:	5-20 Hz, 0.5 inch p-p; 20-2000 Hz, 4.2 g p-p

Ordering information:

Series	Range inches	Termination
LA-25-R-	XX-	XX-
	03 - 3"	00- cord grip with 1 m cable
	06 - 6"	03- 6-pin Turck minifast connector
	09 - 9"	
	12 - 12"	
	15 - 15"	

LA-25-R-XX Configurations					
LA-25-R-XX	-03	-06	-09	-12	-15
Dim 'L'	8.12"L	11.87"L	14.87"L	18.87"L	22.87"L

ELECTRICAL TERMINATIONS See connection schematic	
	Cord Grip with cable Length: See data sheet
	6-Pin Connector PT02-10-6P
	6-Pin Connector, 7/8-16 UN Thd.
Other terminations available upon request	

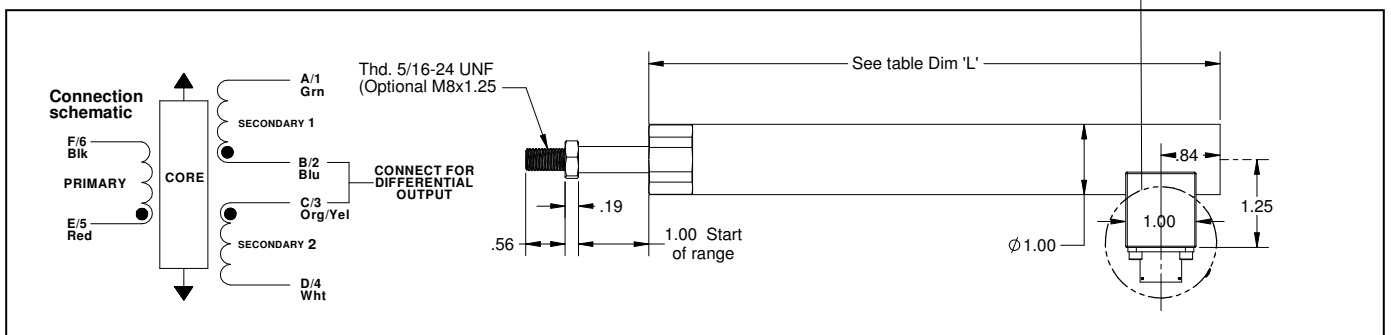

ALLIANCE SENSORS GROUP
A DIVISION OF H.G. SCHAEVITZ LLC

Alliance Sensors Group
102 Commerce Drive, Unit 8
Moorestown, New Jersey 08057 USA
Ph: 856-727-0250
www.alliancesensors.com
info@alliancesensors.com