



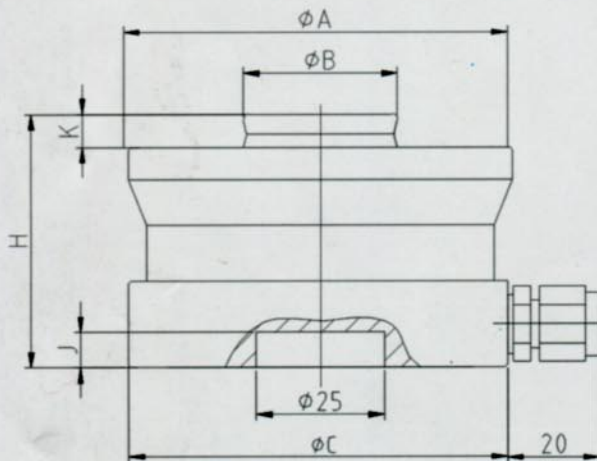


1. 综合精密度高、长期稳定性好.

1.High precision, super stability.

接线图Wiring Schematic Diagram

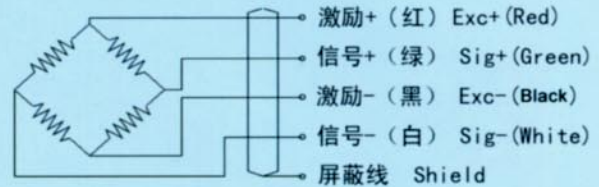

额定载荷 (t) Rated Load	A	B	C	H	J	K
1,2,2.4,7	50	20	60	43	—	7.5
10,15,22	75	30	75	50	7	6.5
33	95	40	95	65	7	10
47	130	60	130	75	7	14
68	130	60	130	85	7	14
100	150	70	150	90	7	16



Technical parameter

数字模块分辨率A/D Module Resolution: 60000码
 额定载荷 Rated Load: 1,2,2.4,7,10,15/22/33/47/68,100 t
 额定输出 Rated Output: 20000/22000/33000/47000/60000内码
 数据刷新速率 Digital Refurbishing Frequency: 50次/秒
 通讯波特率 Communication BPS: 9600 BPS
 综合精度 Combined Error: $\pm 0.02\% F.S$
 蠕变 (30min) Creep (30min): $\pm 0.02\% F.S$
 温度系数 Temperature Effect: $\pm 0.02\% F.S/10^{\circ}C$

使用温度范围 Operating temp.Range: $-30\sim+70^{\circ}C$
 零点输出 Zero Balance: $\pm 0.1\% F.S$
 安全过载 Safe Overload: $150\% F.S$
 防护等级 Environmental Protection: IP68
 推荐输入电压 Recommended Excitation: 9~12V DC
 最大输入电压 Maximum Excitation: 20V DC
 最大传输距离 Maxium Transmitting Distance: 1200m