


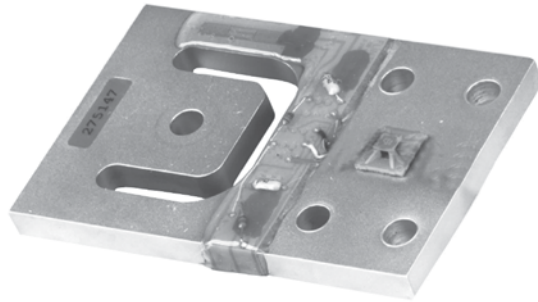

Picture is a representation of actual product

SPECIFICATIONS:

Full Scale Output:	1 mV/V
Bridge Resistance:	1000 ohms
Material/Finish:	Aluminum
Temperature:	Compensated Range 0°F-150°F
Safe Overload:	150% Full Scale
Rated Excitation:	10V DC
Combined Error:	.060% Full Scale
Insulation Resistance:	5000 megohms
Seal Type:	IP65
Cable Length:	1.5 m
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal
Warranty:	One-year limited warranty
Approvals:	

DIMENSIONS

Type	L1	L2	L3	L4	L5	W1	W2	H1	H2 (min)	D1	D2	Deflection (mm) at E max
PB-15 kg-RS	70	4.9	14	28	23.7	39	27.8	4.1	4.5	7.6	5.1	0.27
PB-37.5 kg-RS	76.2	6	15	29.3	27	44.5	30	4.8	5	7.6	6.6	0.36
PB-75 kg-RS	84.4	6.4	15	34	27.7	54.8	30	6.4	5	7.6	6.6	0.35
PB-150 kg-RS	107.3	7.8	22.9	45.9	38.4	69.9	44.5	7.9	6	9.1	8.1	0.56

PB Planar Order Information

Load Rating	Part #	Price
15 kg (36.4 lb)	96361	Consult
37.5 kg (82.7 lb)	96362	Consult
75 kg (165.4 lb)	96363	Consult
150 kg (330.7 lb)	96364	Consult

