




Picture is a representation of actual product

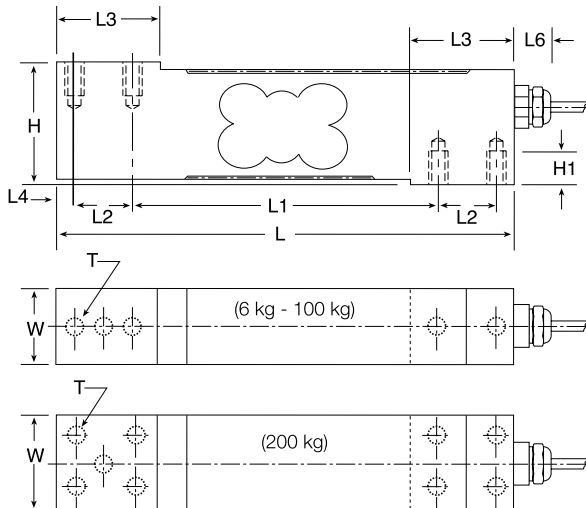

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload:	200% Full scale
Safe Sideload:	100% Full scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.02% Full scale
Insulation Resistance:	5000 megohms
Seal Type:	Environmentally sealed
Cable Length:	3.3'/1 m
Cable Diameter:	.196 polyurethane jacket
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow - Shield

Max Platform Size:	18" x 18"
Warranty:	One-year limited warranty
Approvals:	   Available upon request

DIMENSIONS

Rated Capacity	H	H1	H2	L	L1	L2	L3	L4	L5	L6	W
kg/mm											
10-100	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	25.4
200	40.0	10.0	1.5	150.0	100.0	19.0	32.0	6.0	15.5	20.0	38.1
lb/inches											
33.1-220.5	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.00
441.0	1.57	.40	.06	5.90	3.93	.75	1.26	.24	.61	.79	1.50

PC1 Order Information

Load Rating	Part#	Price
10 kg (22.0 lb)	41821	Consult
15 kg (33.1 lb)	36219	Consult
30 kg (66.1 lb)	36220	Consult
50 kg (110.2 lb)	36221	Consult
75 kg (165.4 lb)	36222	Consult
100 kg (220.5 lb)	36223	Consult
200 kg (441.0 lb)	36224	Consult