




Picture is a representation of actual product

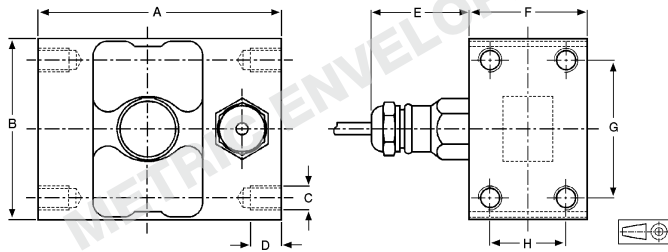

### SPECIFICATIONS:

<b>Full Scale Output:</b>	2.0 mV/V
<b>Bridge Resistance:</b>	1000 ohms, nominal
<b>Material/Finish:</b>	Stainless steel
<b>Temperature:</b>	Compensated range 0°F to 150°F/-18°C to 65°C
<b>Safe Overload:</b>	200% Full scale
<b>Safe Sideload:</b>	100% Full scale
<b>Rated Excitation:</b>	10V DC (15V maximum)
<b>Combined Error:</b>	0.02% Full scale
<b>Insulation Resistance:</b>	5000 megohms
<b>Seal Type:</b>	Hermetically sealed, IP69K
<b>Cable Length:</b>	10'/3.1 m
<b>Cable Diameter:</b>	.196 polyurethane jacket
<b>Cable Color Code:</b>	Green ..... + Excitation Black ..... - Excitation White ..... + Signal Red ..... - Signal Yellow ..... - Shield
<b>Warranty:</b>	One-year limited warranty

**Approvals:**



### DIMENSIONS

Rated Capacity	A	B	C	D	E	F	G	H
<b>kg/mm</b>								
150	101.6	75.0	M10	13.0	41.0	49.5	57.2	31.8
<b>lb/inches</b>								
330.8	4.00	2.95	M10	.51	1.61	1.95	2.25	1.25

### PC2 Order Information

Load Rating	Part#	Price
150 kg (330.7 lb)	41176	Consult