


Picture is a representation of actual product

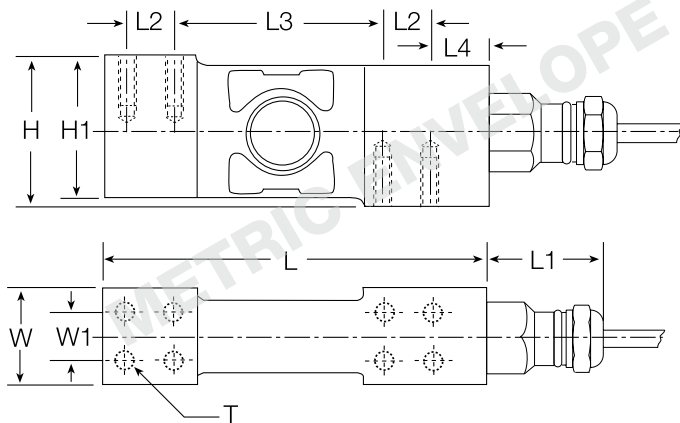

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	1000 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 0°F to 150°F/-18°C to 65°C
Safe Overload:	200% Full scale
Safe Sideload:	100% Full scale
Rated Excitation:	10V DC (15V maximum)
Combined Error:	0.02% Full scale
Insulation Resistance:	5000 megohms
Seal Type:	Hermetically sealed, IP69K
Cable Length:	3.3'/1 m
Cable Diameter:	.196 polyurethane jacket
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow - Shield
Max Platform Size:	24" x 24"
Warranty:	One-year limited warranty
Approvals:	 

DIMENSIONS

Rated Capacity	H	H1	L	L1	L2	L3	L4	W	W1	T
kg/mm										
20-200	48.0	45.5	123.0	41.0	15.2	67.6	17.8	30.1	15.2	8 x M6/15 DP
lb/inches										
66.1-441.0	1.89	1.80	4.84	1.61	.60	2.66	.70	1.18	.60	8 x M6/15 DP

PC6 Order Information

Load Rating	Part#	Price
20 kg (44.1 lb)	36225	Consult
50 kg (110.2 lb)	36226	Consult
100 kg (220.5 lb)	36227	Consult
200 kg (441.0 lb)	36228	Consult

Interchangeable products

Manufacturer	Model	Page #
Rice Lake Weighing Systems	RLPC6	164