



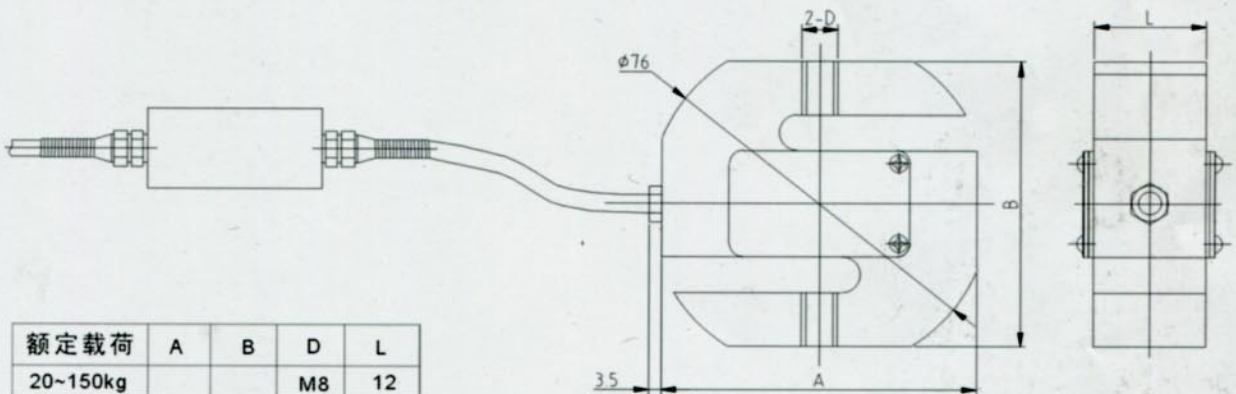

- 1.高精度、高可靠性、稳定性好;
 - 2.可拉、压受力、输出对称性;
 - 3.结构紧凑, 安装方便。
- 1.High precision, high reliability,super stability.
 - 2.Good capacity of tension and compression force, super symmetry of output;
 - 3.Compact construction,easy installation.

接线图Wiring Schematic Diagram

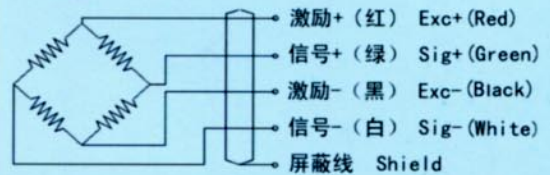

额定载荷	A	B	D	L
20~150kg	70	64	M8	12
200~500kg			M12	20
700~1000kg			M12	25
1.2~5t	90	90	M20	32
7.5t			M24	40

Technical parameter

数字模块分辨率A/D Module Resolution: 60000码
 额定载荷Rated Load: 20,30,50,75,100,150,200,250,300,500,700kg
 1,1.2,1.5,2,2.5,3,5,7.5,t
 额定输出Rated Output: 20000内码
 数据刷新速率Digital Refurbishing Frequency: 50次/秒
 通讯波特率Communication BPS: 9600 BPS
 综合精度Combined Error: $\pm 0.02\%F.S$
 蠕变(30min) Creep(30min): $\pm 0.02\%F.S$

温度系数 Temperature Effect: $\pm 0.02\%F.S/10^{\circ}C$
 使用温度范围 Operating temp.Range: $-30\sim+70^{\circ}C$
 零点输出 Zero Balance: $\pm 0.1\%F.S$
 安全过载 Safe Overload: 120%F.S
 防护等级 Environmental Protection: IP67
 推荐输入电压 Recommended Excitation: 9~12V DC
 最大输入电压 Maximum Excitation: 20V DC
 最大传输距离 Maxium Transmitting Distance: 1200m