

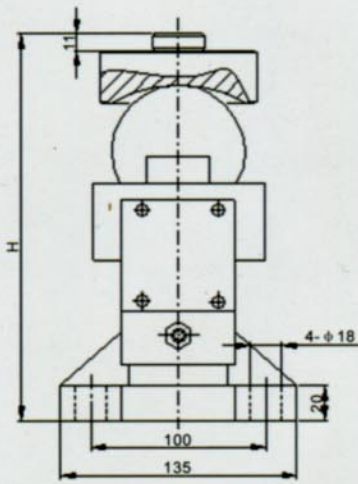


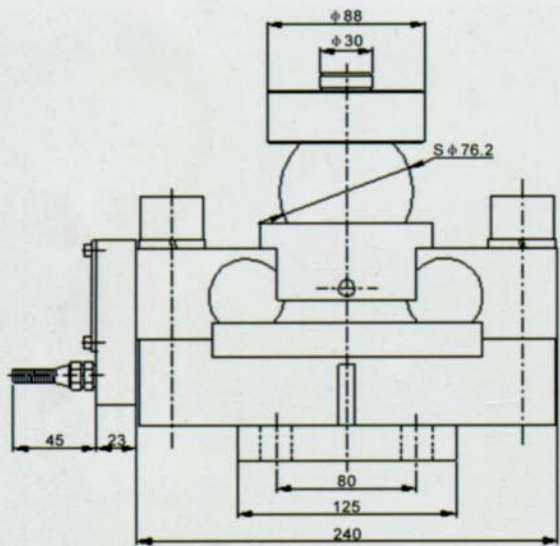

- 1)高精度、高可靠性、稳定性好;
 - 2)采用钢球、压头结构可自动复位和调心:
抗侧向力和抗冲击性能好;
 - 3)安装方便, 互换性好:
- 1.High precision, high reliability, super stability.
- 2.The construction with steel ball and cap has many advantages in self-reposition place,certre-adjustment, anti-side force, anti-wallopp etc.
- 3.Easy installation, quite good exchangeability.

接线图Wiring Schematic Diagram

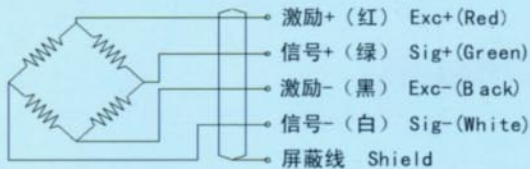

额定载荷(t)	H
10~30	224.7
40	230.7

Technical parameter

数字模块分辨率A/D Module Resolution: 60000码

额定载荷 Rated Load: 10,15,20/25/30/40t

额定输出 Rated Output: 20000/25000/30000/40000内码

数据刷新速率 Digital Refurbishing Frequency: 50次/秒

通讯波特率 Communication BPS: 9600 BPS

综合精度 Combined Error: $\pm 0.02\%F.S$

蠕变 (30min) Creep(30min): $\pm 0.02\%F.S$

温度系数 Temperature Effect: $\pm 0.02\%F.S/10^{\circ}C$

使用温度范围 Operating temp.Range: $-30\sim+70^{\circ}C$

零点输出 Zero Balance: $\pm 0.1\%F.S$

安全过载 Safe Overload: 150%F.S

防护等级 Environmental Protection: IP68

推荐输入电压 Recommended Excitation: 9~12V DC

最大输入电压 Maximum Excitation: 20V DC

最大传输距离 Maxium Transmitting Distance: 1200m