



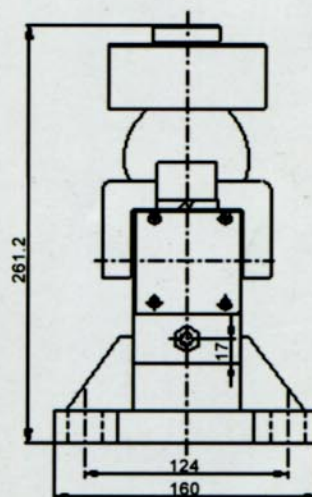

- 1) 高精度、高可靠性、稳定性好;
 - 2) 采用钢球、压头结构可自动复位和调心:
抗侧向力和抗冲击性能好;
 - 3) 安装方便, 互换性好;
1. High precision, high reliability, super stability.
 2. The construction with steel ball and cap has many advantages in self-reposition, center-adjustment, anti-side force, anti-wallop etc.
 3. Easy installation, quite good exchangeability.

接线图Wiring Schematic Diagram

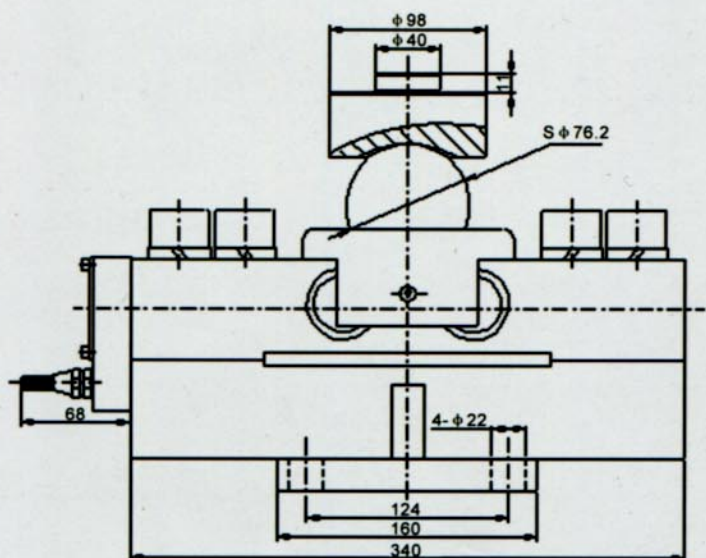

Technical parameter

数字模块分辨率A/D Module Resolution: 60000码
 额定载荷Rated Load: 50t
 额定输出Rated Output: 50000内码
 数据刷新速率Digital Refurbishing Frequency: 50次/秒
 通讯波特率Communication BPS: 9600 BPS
 综合精度Combined Error: $\pm 0.02\% F.S$
 蠕变(30min) Creep(30min): $\pm 0.02\% F.S$
 温度系数Temperature Effect: $\pm 0.02\% F.S/10^{\circ}C$

使用温度范围Operating temp. Range: $-30 \sim +70^{\circ}C$
 零点输出Zero Balance: $\pm 0.1\% F.S$
 安全过载Safe Overload: $150\% F.S$
 防护等级Environmental Protection: IP68
 推荐输入电压Recommended Excitation: 9~12V DC
 最大输入电压Maximum Excitation: 20V DC
 最大传输距离Maxium Transmitting Distance: 1200m