



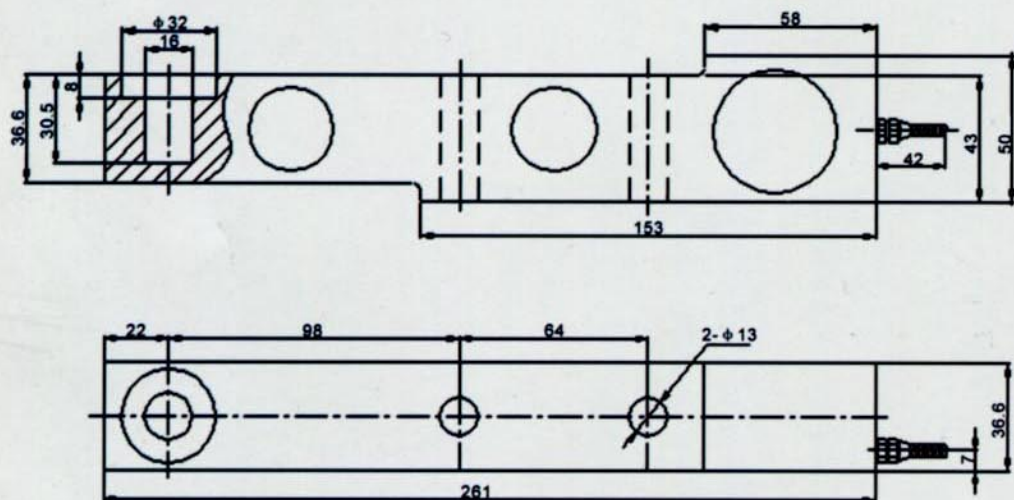

1. 优异的抗偏载设计, 抗侧向力和抗冲击性好;
2. 高精度, 长期稳定性;
3. 安装方便, 互换性好.

1. The design has superiority in anti-eccentric load, dustproof, anti-side force, and anti-wallop.
2. High precision, super stability.
3. Easy installation, quite good exchangeability.

接线图Wiring Schematic Diagram

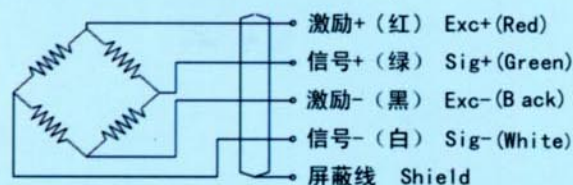

Technical parameter

数字模块分辨率A/D Module Resolution:	60000码	使用温度范围 Operating temp.Range:	-30~+70℃
额定载荷 Rated Load:	1,2,3 t	零点输出 Zero Balance:	±0.1%F.S
额定输出 Rated Output:	20000内码	安全过载 Safe Overload:	150%F.S
数据刷新速率 Digital Refurbishing Frequency:	50次/秒	防护等级 Environmental Protection:	IP68
通讯波特率 Communication BPS:	9600 BPS	推荐输入电压 Recommended Excitation:	9~12V DC
综合精度 Combined Error:	±0.02 %F.S	最大输入电压 Maximum Excitation:	20V DC
蠕变 (30min) Creep(30min):	±0.02 %F.S	最大传输距离 Maxium Transmitting Distance:	1200m
温度系数 Temperature Effect:	±0.02 %F.S/10℃		