


SL26S5 Compression Canister

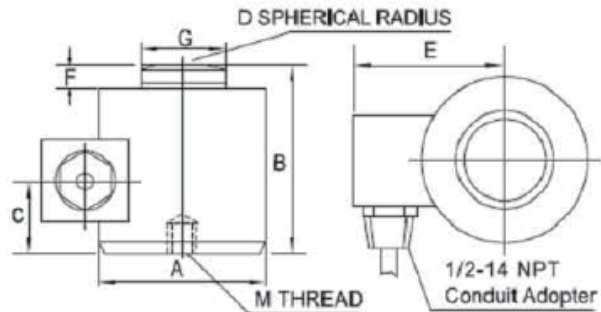

SPECIFICATIONS

Rated Output	$2 \pm 0.01 \text{mV/V FS}$
Nonlinearity	$\pm 0.05\% \text{ FS}$
Hysteresis	$\pm 0.03\% \text{ FS}$
Repeatability	$\pm 0.01\% \text{ FS}$
Creep	$\pm 0.03\% \text{ FS/30min}$
Zero Balance	$\pm 1\% \text{ FS}$
Input Resistance	$450 \pm 5 \Omega$
Output Resistance	$480 \pm 3 \Omega$
Insulation Resistance	$\geq 5000 \text{M}\Omega$
Material	Stainless Steel
Cable Color Code	

Temperature Shift On Zero	$\pm 0.027\% \text{ FS/}10^\circ\text{C}$
Temperature Shift On Rated Output	$\pm 0.015\% \text{ FS/}10^\circ\text{C}$
Excitation Voltage-VDC MAX	15V
Compensated Temperature Range	-10 to $+50^\circ\text{C}$
Operating Temperature Range	-20 to $+60^\circ\text{C}$
Safe Overload	150% FS
Ultimate Overload	300% FS
Protection Class	IP67
Cable Length	29.5'/9m

Red +Excitation, **Black** -Excitation, **Green** +Signal, **White** -Signal

DIMENSIONS

inch

Capacities	M		A	B	C	F	G	D
lb	inch	dp						
10k, 25k, 50k	1/2-20	0.31	2.88	3.25	1.58	0.40	1.25	6.00
100k	3/4-16	0.56	4.12	5.00	2.45	0.51	2.31	6.00
200k, 300k	3/4-16	0.75	6.00	7.25	3.65	1.04	3.13	17.00
500k	3/4-16	0.75	6.50	9.00	4.81	1.00	3.69	17.00

Dimensions and specifications are subject to change without notice.



San Diego, CA USA

<http://www.sensolink.com>

E-mail: sales@sensolink.com