


SLC200 Compression Canister

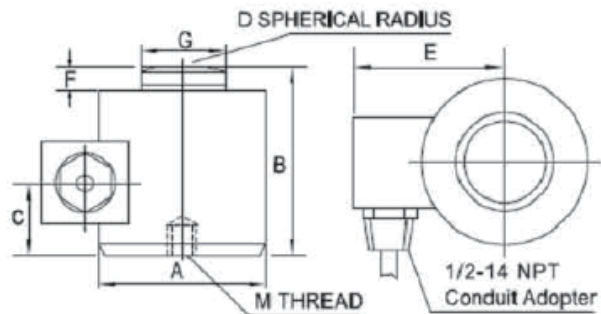

SPECIFICATIONS

Rated Output	$2 \pm 0.01 \text{ mV/V FS}$
Nonlinearity	$\pm 0.03\% \text{ FS}$
Hysteresis	$\pm 0.03\% \text{ FS}$
Repeatability	$\pm 0.01\% \text{ FS}$
Creep	$\pm 0.02\% \text{ FS/30min}$
Zero Balance	$\pm 1\% \text{ FS}$
Input Resistance	$450 \pm 5 \Omega$
Output Resistance	$480 \pm 3 \Omega$
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Material	Stainless Steel
Cable Color Code	

Temperature Shift On Zero	$\pm 0.02\% \text{ FS/10}^\circ\text{C}$
Temperature Shift On Rated Output	$\pm 0.02\% \text{ FS/10}^\circ\text{C}$
Excitation Voltage-VDC MAX	15V
Compensated Temperature Range	-10 to +50 °C
Operating Temperature Range	-20 to +60 °C
Safe Overload	150% FS
Ultimate Overload	300% FS
Protection Class	IP67
Cable Length	29.5' / 9m

Red +Excitation, **Black** -Excitation, **Green** +Signal, **White** -Signal

DIMENSIONS

					inch						
Capacities		M			A	B	C	D	E	F	G
lb	t	inch	mm	dp							
10k, 25k, 50k	5, 10, 20	1/2-20	M12*1.75	0.39	3.00	3.25	1.28	6.00	2.52	0.35	1.25
100k	50	3/4-16	M18*1.5	0.55	4.13	5.00	2.45	6.00	3.20	0.50	2.31
200k, 300k, 400k	100	3/4-16	M20*1.5	0.75	6.00	7.25	3.50	17.00	4.30	1.00	3.00
500k	200	3/4-16	M20*1.5	0.75	6.50	9.00	4.62	17.00	4.45	0.60	3.30

Dimensions and specifications are subject to change without notice.



San Diego, CA USA

<http://www.sensolink.com>

E-mail: sales@sensolink.com