


SLCX

Compression Canister

Tool Steel

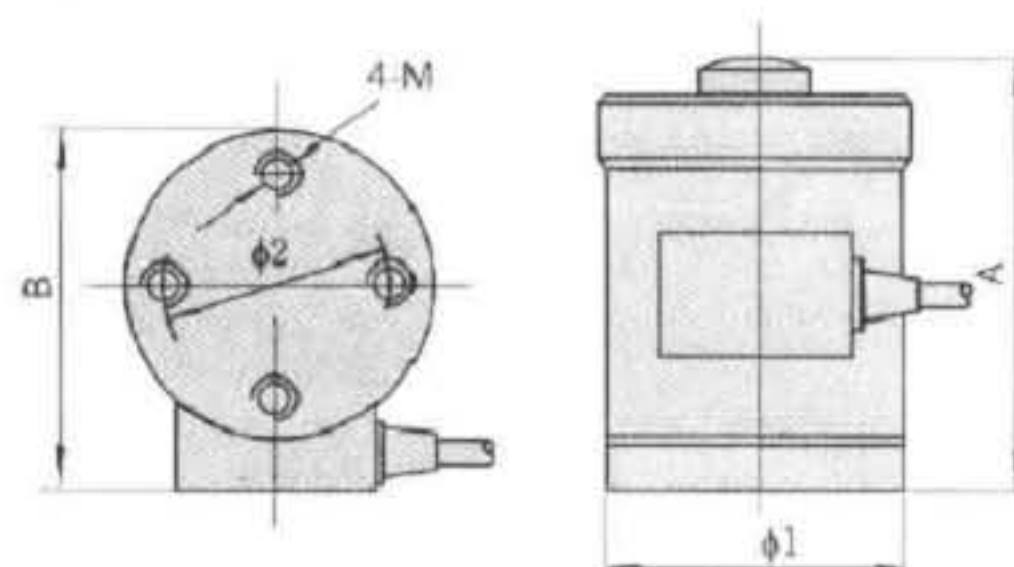

SPECIFICATIONS:

Rated Output	$2 \pm 0.01 \text{ mV/V FS}$
Nonlinearity	$\pm 0.03\% \text{ FS}$
Hysteresis	$\pm 0.03\% \text{ FS}$
Repeatability	$\pm 0.02\% \text{ FS}$
Creep	$\pm 0.03\% \text{ FS/30min}$
Zero Balance	$\pm 1\% \text{ FS}$
Temperature Effect On Zero	$\pm 0.03\% \text{ FS/10}^\circ\text{C}$
Temperature Effect On Rated Output	$\pm 0.03\% \text{ FS/10}^\circ\text{C}$
Input Resistance	$385 \pm 10 \Omega$
Output Resistance	$350 \pm 3 \Omega$
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Excitation Voltage	10(Recommended), 15(Max)VDC/AC
Compensated Temperature Range	$-10 \text{ to } +50^\circ\text{C}$
Operating Temperature Range	$-20 \text{ to } +60^\circ\text{C}$
Safe Overload	120% FS
Ultimate Overload	300% FS
Protection Class	IP 66
Cable Length	5m
Cable Color Code	Red + Excitation, Black -Excitation, Green + Signal, White -Signal

DIMENSIONS:

Capacity	mm				
	A	B	$\varnothing_1$	$\varnothing_2$	M
t					
0.1,0.2,0.3,0.5,0.7,1,2,3,5	88	78	64	38	8
10	106	88	76	46	8
15 , 20	130	107	88	56	8
30	126	128	106	72	10

Dimensions and specifications are subject to change without notice.



<http://www.sensolink.com> E-mail:sales@sensolink.com