

▶ SP9M

▶ TANK MOUNT

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com




Coti, Inc. - Model SP9 Canister Tank Mount Assembly Includes Load Cell

Tank mount assembly uses a hermetically sealed canister load cell with two attached mounting plates. The lower plate is rigidly mounted to the load cell. The top plate allows horizontal expansion but does not separate from the load cell. All Stainless Steel Construction.

ORDER INFORMATION		DISCOUNT C	SUGGESTED
Part #	Capacity		List Price
SP9M-1K-5	1,000 lb	5" Plates	\$1150.00
SP9M-2K-5	2,000 lb	5" Plates	\$1150.00
SP9M-5K-5	5,000 lb	5" Plates	\$1150.00
SP9M-10K-5	10,000 lb	5" Plates	\$1150.00
SP9M-20K-5	20,000 lb	5" Plates	\$1150.00
SP9M-25K-5	25,000 lb	5" Plates	\$1150.00
SP9M-50K-5	50,000 lb	5" Plates	\$1150.00
SP9M-100K-5	100,000 lb	5" Plates	\$1250.00
SP9M-1K-8	1,000 lb	8" Plates	\$1400.00
SP9M-2K-8	2,000 lb	8" Plates	\$1400.00
SP9M-5K-8	5,000 lb	8" Plates	\$1400.00
SP9M-10K-8	10,000 lb	8" Plates	\$1400.00
SP9M-20K-8	20,000 lb	8" Plates	\$1400.00
SP9M-25K-8	25,000 lb	8" Plates	\$1400.00
SP9M-50K-8	50,000 lb	8" Plates	\$1400.00
SP9M-100K-8	100,000 lb	8" Plates	\$1500.00
SP9M-150K-8	150,000 lb	8" Plates	\$1900.00
SP9M-200K-8	200,000 lb	8" Plates	\$1900.00

Main Dimensions and Accessories

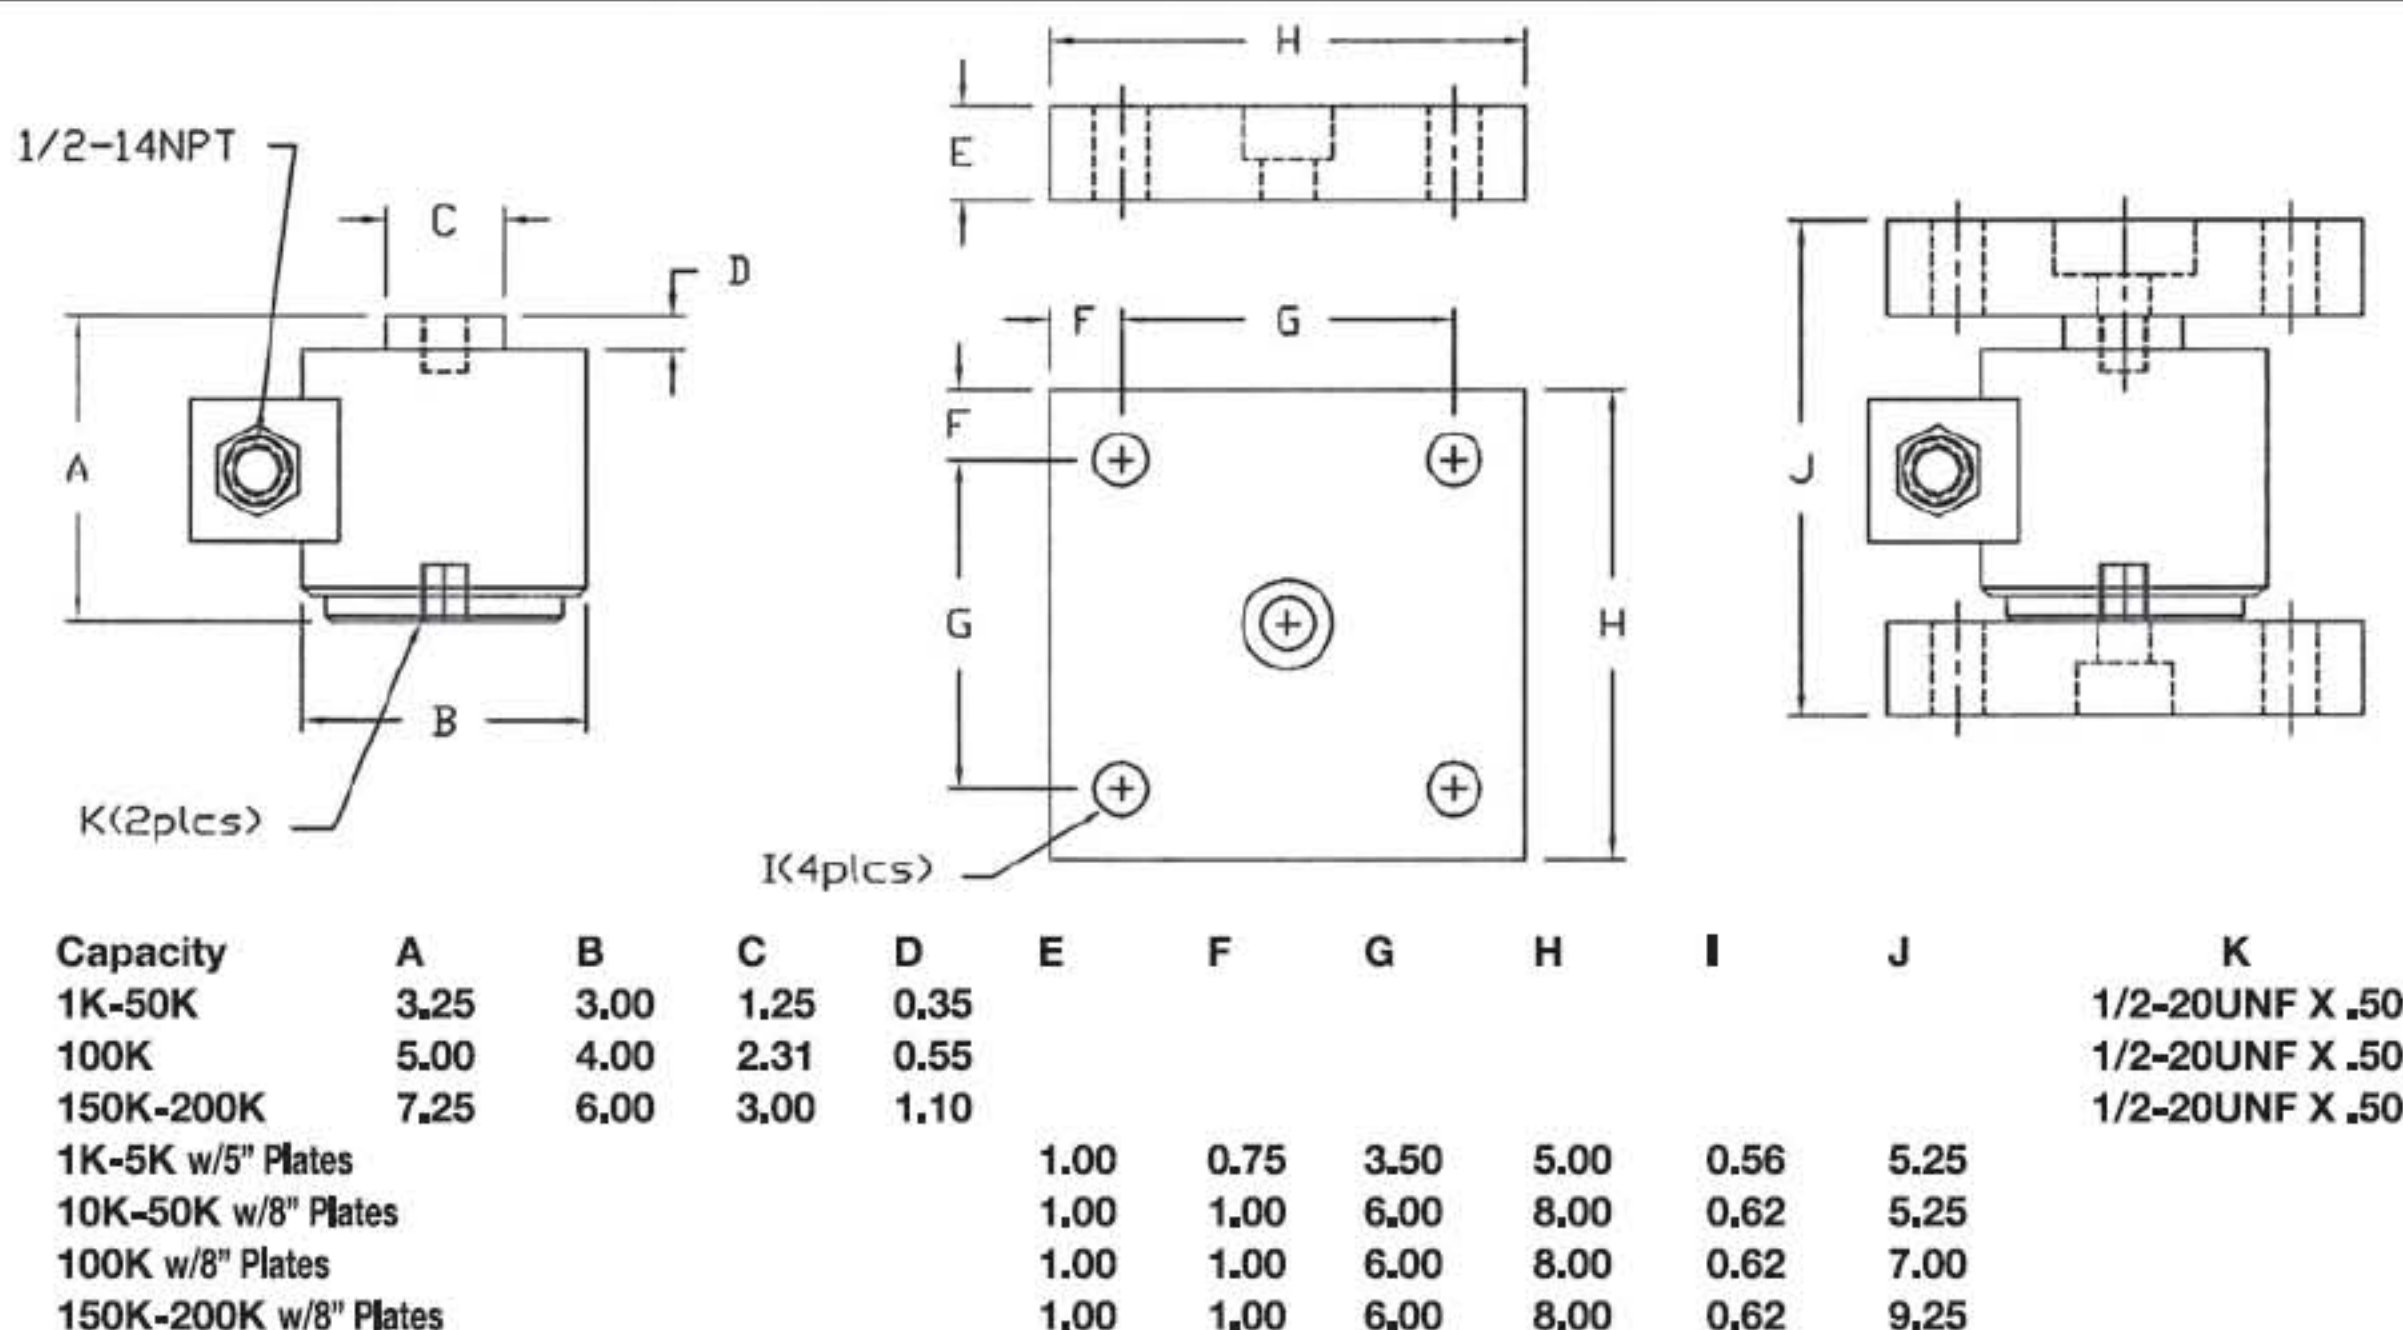

▶ LOAD CELL PERFORMANCE SPECIFICATIONS ◀

Full Scale Output (mV/V)	2.00	Safe Overload	150% FS
Load Cell Resistance	350 ohms	Excitation Voltage	10V AC/DC (15V Max)
Load Cell Cable	4 Conductor, 30'	Operating Temperature Range	-10°C - +40°C
Material:			
Load Cell:	Stainless Steel	Assembly:	Stainless Steel