


T2P1 Tension Canister, Alloy Steel



Picture is a representation of actual product

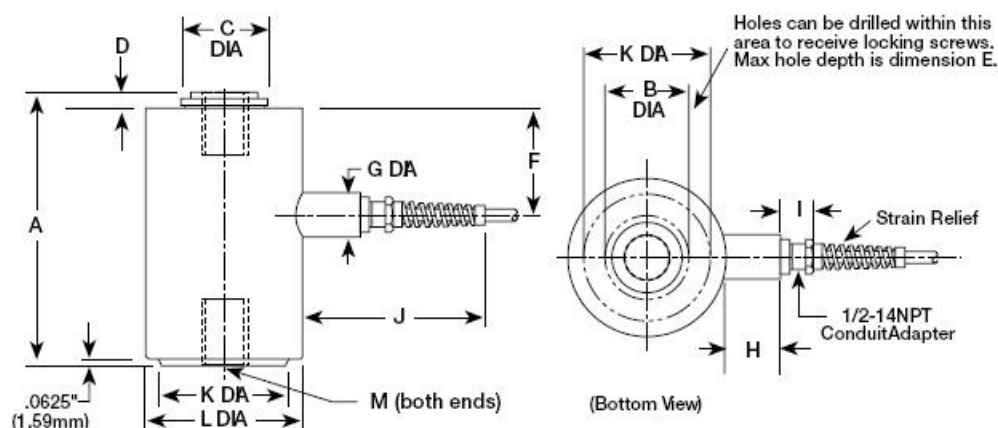

RATED CAPACITY	A	B	C	D	E	F	G	H	I	J	K	L	M
lb/inches													
20,000	8.50	2.63	2.75	.50	1.00	3.38	1.38	1.81	1.00	5.81	4.00	5.00	1 1/2-12 UNF-2B x 2DP
50,000	11.44	3.75	4.00	.63	1.00	5.00	1.38	1.81	1.00	5.81	5.75	6.50	2-12UNF-2B x 2.63DP
kg/mm													
9071.9	215.9	66.8	69.9	12.7	25.4	85.9	35.1	46.0	25.4	147.6	101.6	127.0	1 1/2-12 UNF-2B x 50.8DP
22,679.7	290.6	95.3	101.6	16.0	25.4	127.0	35.1	46.0	25.4	147.6	146.1	165.1	2-12 UNF-2B x 66.7DP

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	High-alloy steel, epoxy coated
Temperature:	Compensated range 0°F to 150°F/-17°C to 65°C
Seal Type:	Environmentally sealed
Safe Overload:	150% Full scale
Rated Excitation:	10V AC/DC (20V maximum)
Combined Error:	±0.03% Full scale
Repeatability:	0.02% Full scale

Insulation Resistance:	5000 megohms
Deflection at Capacity:	20,000 lb = .0075"/.191 mm, 50,000 lb = .0100"/.254 mm
Cable Length:	35'/10.7 m
Cable Color Code:	Green..... + Excitation Black..... - Excitation White..... + Signal Red..... - Signal Yellow..... Shield
Warranty:	1-year limited warranty

T2P1 ORDER INFORMATION

Load Rating	Part #	Price
20,000 lb (9071.9 kg)	17660.....	\$2,850.00
50,000 lb (22,679.6 kg)	17661.....	\$2,950.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Fairbanks*	657090, 657091
Streeter Richardson.....	2011711, 2011712