

T92 & T93

► **COMPRESSION CANISTER**

► **STAINLESS STEEL**
Hermetically Sealed

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com




T92 & T93 ORDER INFORMATION DISCOUNT C SUGGESTED LIST PRICE

5K
10K
20K
25K
50K
100K
150K
200K

INTERCHANGEABLE PRODUCTS

Revere.....	92
Totalcomp.....	T92
Revere.....	93
Totalcomp.....	T93

Main Dimensions and Accessories

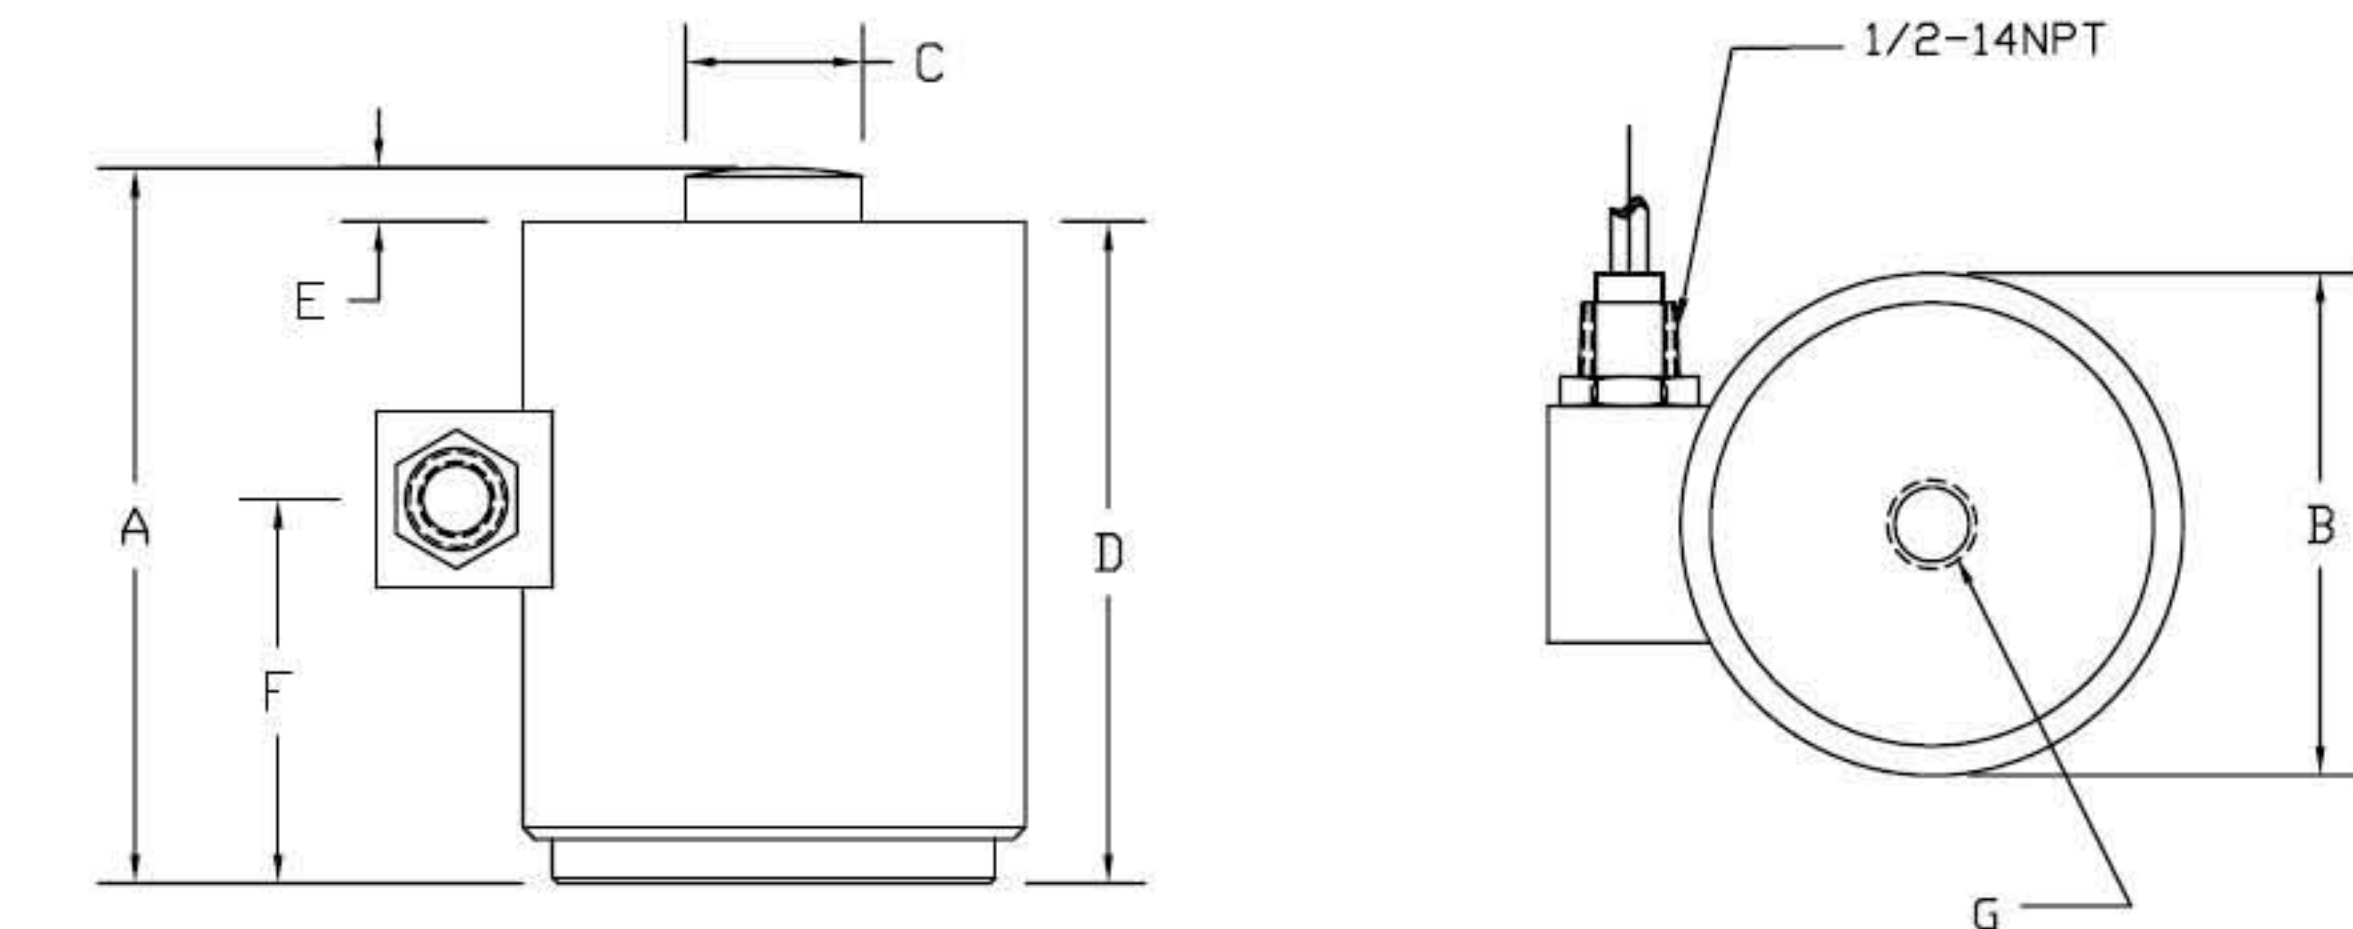

RATED CAPACITY	DIMENSIONS									
			A	B	C	D	E	F	G	
5K-10K			4.00	3.53	1.00	3.56	0.40	1.50	1/2-20UNF x.50deep	
15K-20K			5.00	3.53	1.00	4.56	0.40	2.00	1/2-20UNF x.50deep	
50K			6.00	4.25	1.50	5.44	0.50	3.25	3/4-16UNF x.75deep	
100K			8.50	5.03	1.75	7.81	0.63	5.25	3/4-16UNF x.75deep	
150K-200K			11.03	6.53	2.50	10.44	0.63	6.00	3/4-16UNF x.75deep	

► SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 or 3.00	Bridge Resistance	350
Nonlinearity	+/- 0.03% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.03% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	50' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Hermetically Sealed, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	