

TB2

► SINGLE-ENDED BEAM

► STAINLESS STEEL

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com



TB2 ORDER INFORMATION

DISCOUNT C SUGGESTED LIST PRICE

100 lb
200 lb
500 lb
1K
2K

INTERCHANGEABLE PRODUCTS

Toledo..... 1110 Series, 1178 Series, 12744300B, 2155 Base
2855 Base, 2095 Platform

ACCESSORIES


DISCOUNT G SUGGESTED LIST PRICE

Stock # 654

Bearing Cup and Ball

\$ 80.00

Main Dimensions and Accessories

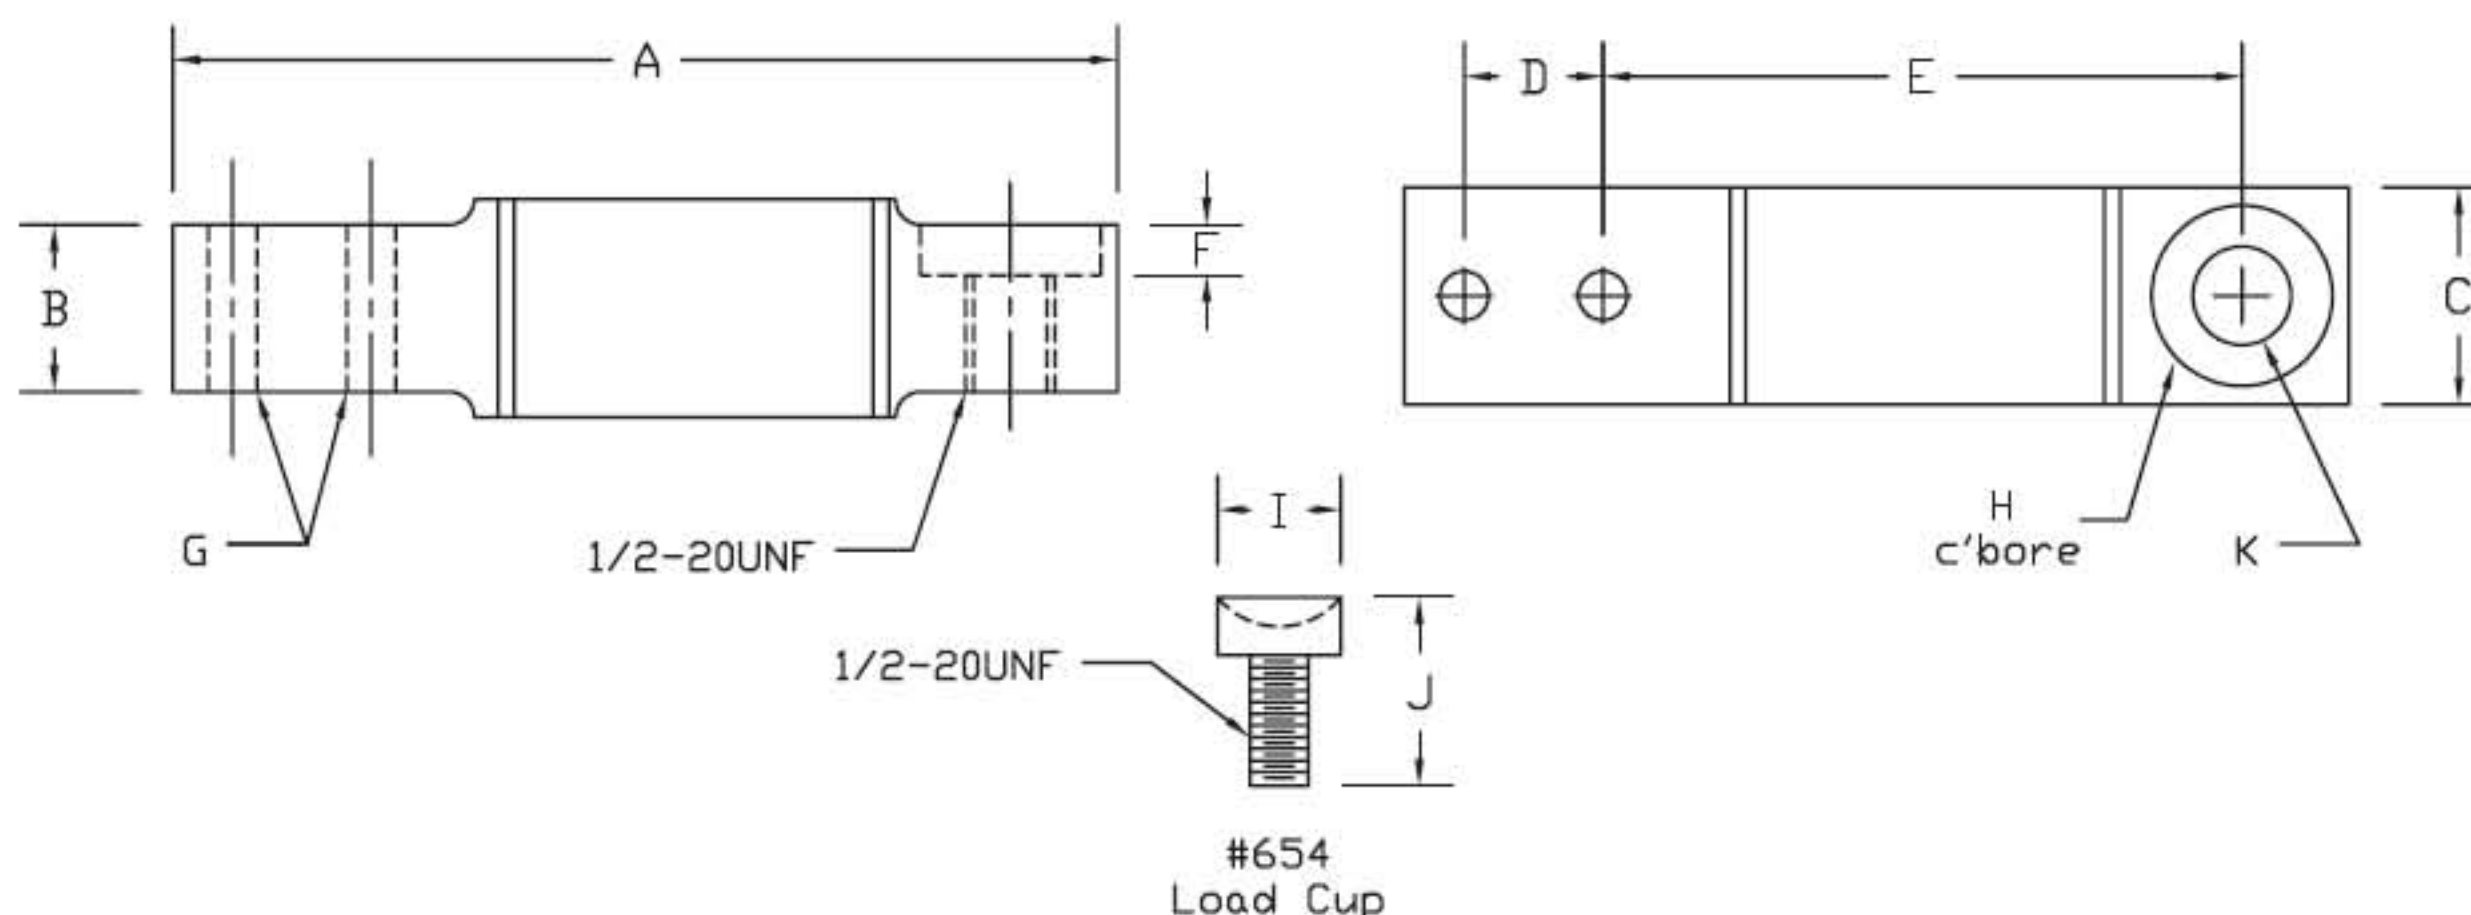

RATED CAPACITY	DIMENSIONS												
			A	B	C	D	E	F	G	H	I	J	K
100-200LB			5.37	1.38	1.75	1.00	3.63	-	0.53	-	-	-	0.19
500LB-2K			6.12	1.38	1.75	1.00	4.00	0.69	0.53	1.09	-	-	0.50
Load Cup			-	-	-	-	-	-	-	-	1.06	1.62	-

SPECIFICATIONS

Rated Output (mV/V)	2.00	Bridge Resistance	440
Nonlinearity	+/- 0.02% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.02% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	30' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Environmentally-Sealed, IP67
Cable Color Code	Input Green +Excitation Black -Excitation	Output White +Signal Red -Signal	