

▶ TC62 & TC63

▶ TENSION/COMPRESSION
CANISTER

▶ STAINLESS STEEL
Hermetically Sealed

Coti, Inc. • 122 Export Circle • Huntsville, Alabama 35806 • Toll Free: 1-888-268-4462 • Fax: 256-859-5024 • www.cotiinc.com




TC62 & TC63 ORDER INFORMATION DISCOUNT C SUGGESTED LIST PRICE

200 lb, 300 lb
500 lb, 750 lb, 1000 lb
2000 lb, 3000 lb

INTERCHANGEABLE PRODUCTS

Revere.....	62HU
Totalcomp.....	T62
Streeter Richardson.....	201170X
Toledo@.....	10048X00 A
Revere.....	63HU
Totalcomp.....	T63
Artech.....	90510

Main Dimensions and Accessories

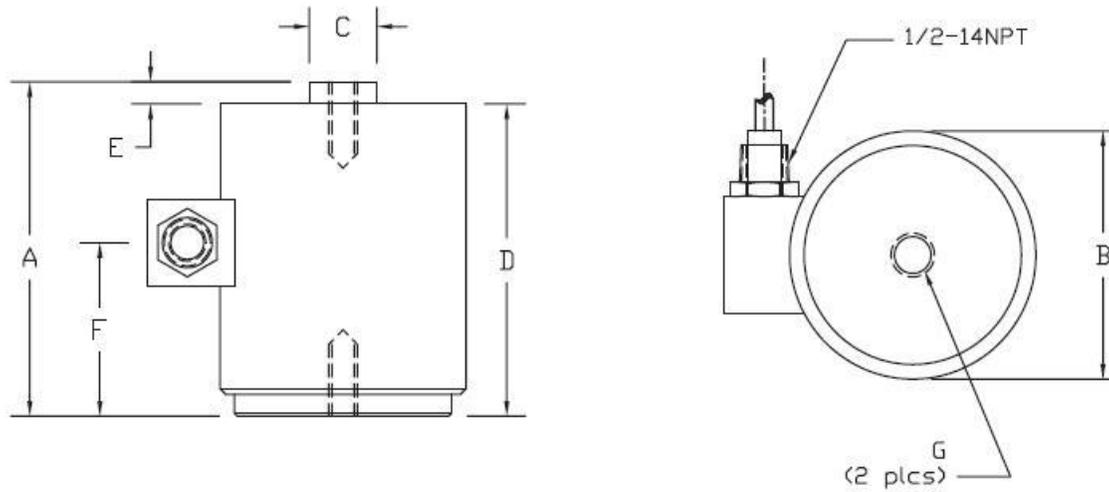

RATED CAPACITY	DIMENSIONS							
	A	B	C	D	E	F	G	
200LB-300LB	3.38	2.75	0.75	2.97	0.75	1.75	3/8-24UNF x 0.38deep	
500LB-1K	4.56	3.50	0.75	4.19	0.75	2.25	1/2-20UNF x 0.50deep	
2K-3K	5.00	4.00	0.75	2.58	0.75	2.50	1/2-20UNF x 0.50deep	

▶ SPECIFICATIONS ◀

Rated Output (mV/V)	2.00 or 3.00	Bridge Resistance	350
Nonlinearity	+/- 0.03% FS	Insulation Resistance	5000 Megohms
Hysteresis	+/- 0.03% FS	Excitation Voltage	10V AC/DC (15V Max)
Repeatability	+/- 0.01% FS	Compensated Temperature Range	-10°C - +50°C
Creep (30 minutes)	+/- 0.02% FS	Operating Temperature Range	-20°C - +60°C
Zero Balance	+/- 1.00% FS	Safe Overload	150% FS
Temperature Effect on Zero	+/- 0.02% FS/10° C	Cable Length	50' Standard Cable
Temperature Effect on Output	+/- 0.02% FS/10° C	Seal Type	Hermetically Sealed, IP67
Cable Color Code	Input	Output	
	Green +Excitation	White +Signal	
	Black -Excitation	Red -Signal	