


Picture is a representation of actual product

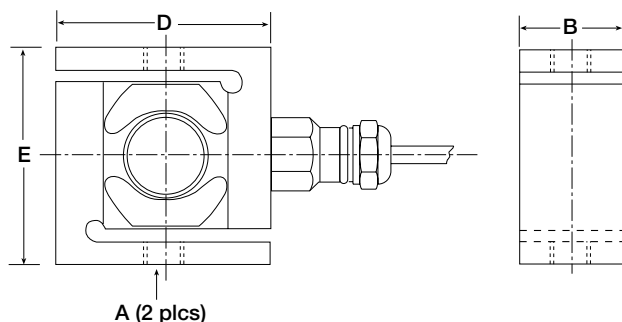

### SPECIFICATIONS:

<b>Full Scale Output:</b>	2.0 mV/V**
<b>Bridge Resistance:</b>	1000 ohms, nominal
<b>Material/Finish:</b>	Stainless steel
<b>Temperature:</b>	Compensated range 14°F to 104°F/-10°C to 40°C
<b>Safe Overload:</b>	200% Full scale
<b>Rated Excitation:</b>	10V DC (15V maximum)
<b>Combined Error:</b>	0.02% Full scale
<b>Insulation Resistance:</b>	5,000 megohms
<b>Seal Type:</b>	Hermetically sealed, IP68
<b>Cable Length:</b>	20'/6.1 m
<b>Cable Diameter:</b>	.196 polyurethane jacket
<b>Cable Color Code:</b>	Green ..... + Excitation Black ..... - Excitation White ..... + Signal Red ..... Signal Yellow ..... - Shield
<b>Warranty:</b>	One-year limited warranty

**Approvals:**



### DIMENSIONS

Rated Capacity	A	B	D	E
<b>lb/inches</b>				
225-1125 (1 kN-5 kN*)	1/2-20 UNF	1.20	2.42	2.42
<b>kg/mm</b>				
102.1-510.3 (1 kN-5 kN*)	1/2-20 UNF	30.0	61.5	61.5

### UB6 Order Information

Load Rating	Part#	Price
225 lb (1 kN*) (102.1 kg)	36214	Consult
450 lb (2 kN*) (204.1 kg)	36215	Consult
1125 lb (5 kN*) (510.3 kg)	36216	Consult

\*kN=Kilonewtons, 1 kN=224.8089 lb

\*\*Matched outputs via mV/V/ohm calibration

†Also available with metric threads