
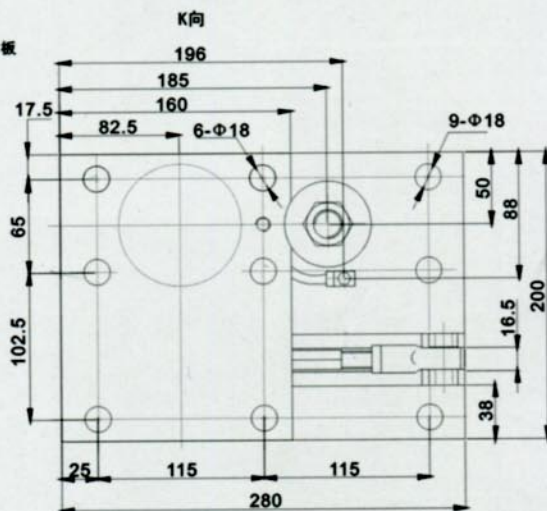
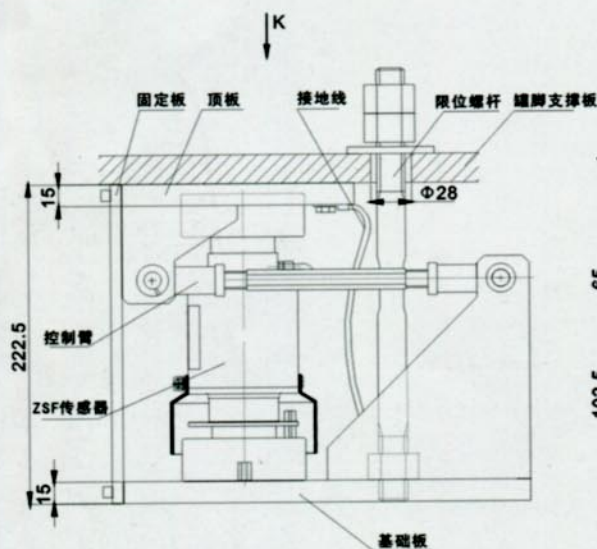


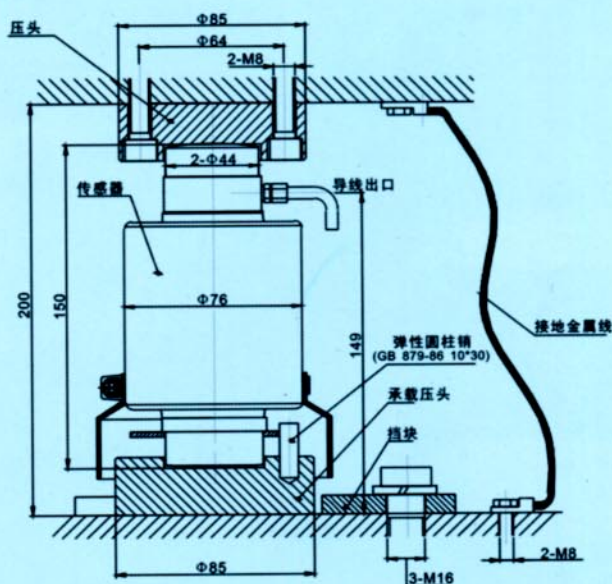

Technical parameter

数字模块分辨率 A/D Module Resolution: 60000 码
 额定载荷 Rated Load: 10, 15, 20/25/30/40/50 t
 额定输出 Rated Output: 20000/25000/30000/45000/50000 内码
 数据刷新速率 Digital Refurbishing Frequency: 50 次/秒
 通讯波特率 Communication BPS: 9600 BPS
 综合精度 Combined Error: $\pm 0.02\% F.S$
 蠕变 (30min) Creep (30min): $\pm 0.02\% F.S$
 温度系数 Temperature Effect: $\pm 0.02\% F.S/10^{\circ}C$

使用温度范围 Operating temp. Range: $-30 \sim +70^{\circ}C$
 零点输出 Zero Balance: $\pm 0.1\% F.S$
 安全过载 Safe Overload: $150\% F.S$
 防护等级 Environmental Protection: IP68
 推荐输入电压 Recommended Excitation: 9~12V DC
 最大输入电压 Maximum Excitation: 20V DC
 最大传输距离 Maxium Transmitting Distance: 1200m