

ISOBLOK®

AC Transient Protector




STANDARD FEATURES

- Two outlets, direct plug-in
- LED indicator for power on
- LED indicator for protection circuitry
- UL1449 listed at 330 volts
- Mounting clamp assures positive connection

SPECIFICATIONS

CLAMP VOLTAGE: 140 V rms	NOISE SUPPRESSION:
PEAK SURGE CURRENT: 6,500 Amps	Frequency Attenuation
CLAMPING TIME: <5 nanoseconds	50 KHz >20 db
INPUT VOLTAGE: 120 VAC	150 KHz >40 db
MAXIMUM CURRENT: 15 Amps	1 MHz >80 db
MAXIMUM POWER: 1875 Watts	>6 MHz >30 db
	DIMENSIONS: 2.37 in W x 4.15 in H x 2.31 in D (60.2 mm W x 105.4 mm H x 58.7 mm D)
	WEIGHT: Approximately 1 lb (0.45 kg)

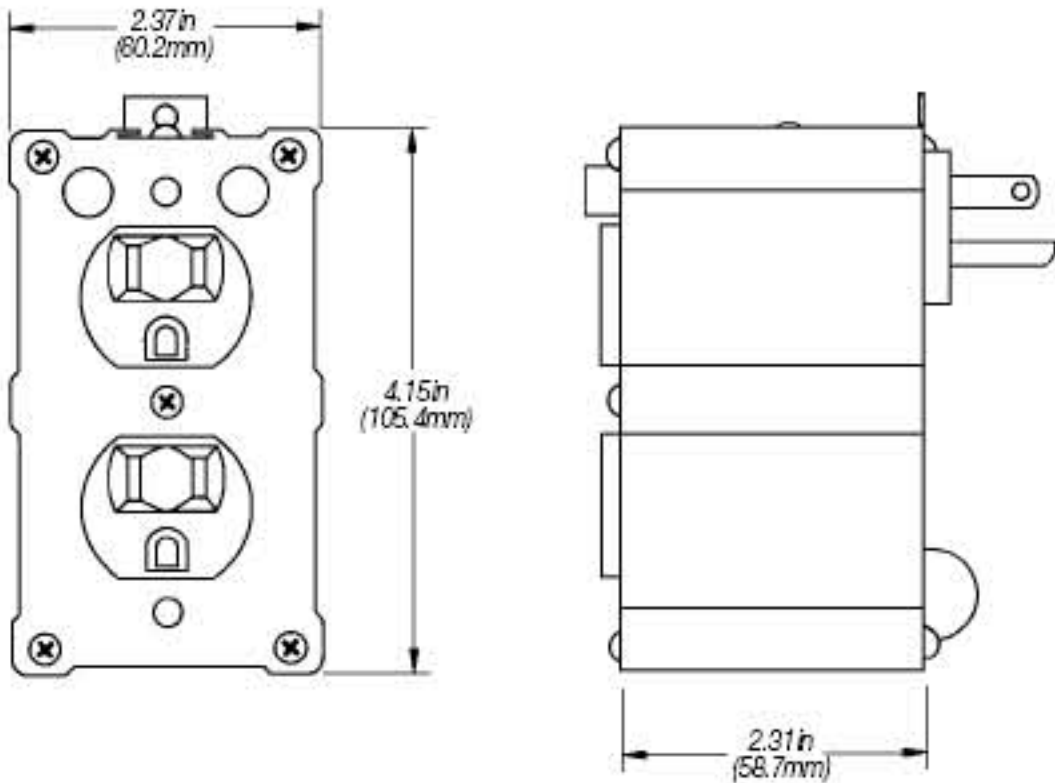

ISOBLOK®

PART #	DESCRIPTION	EST. SHIP WEIGHT
21145.....	ISOBLOK® AC two-outlet transient protector	1 lb