



RLBLP

Planar Beam, Aluminum IP65

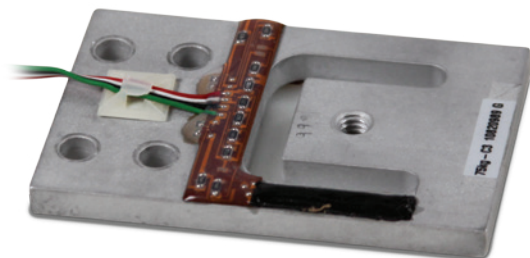

Picture is a representation of actual product

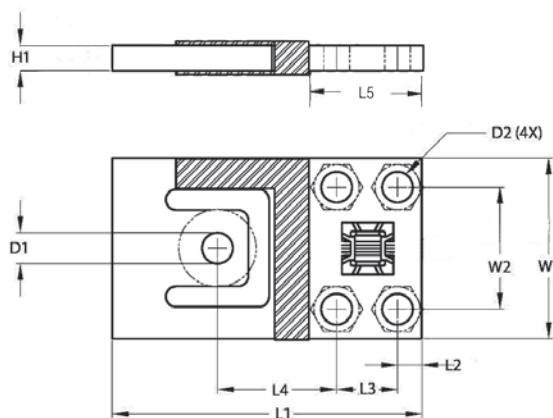

Specifications

Full Scale Output:

1 mV/V

Output Resistance:

1,000 (± 10) ohms

Input Resistance:

1,180 (± 50) ohms

Material/Finish:

Aluminum

Temperature:

Operating range:
-40° F to 150° F/-40° C to 65° C

Safe Overload:

150% full scale

Rated Excitation:

5-15 VDC

Combined Error:

0.05% full scale

Seal Type:

Environmentally sealed, IP65

Insulation Resistance:

5,000 megohms

Cable Length:

3.75 kg, 7.5 kg, 15 kg=1.0 m
37.5 kg, 75 kg, 375 kg=1.5 m

Cable Color Code:

Green..... + Excitation
Black..... - Excitation
White..... + Signal
Red..... - Signal

Warranty:

Two-year limited warranty

Dimensions

RATED CAPACITY KG/MM	L1	L2	L3	L4	L5	W1	W2	H1	D1	D2
RLPB-15 kg-RS	70.00	4.9	14.00	28.00	23.7	39.00	27.8	4.1	7.6	5.1
RLPB-37.5 kg-RS	76.2	6.00	15.00	29.3	27.00	44.5	30.00	4.8	7.6	6.6
RLPB-75 kg-RS	84.4	6.4	15.00	34.00	27.7	54.8	30.00	6.4	7.6	6.6
RLPB-150 kg-RS	107.3	7.8	22.9	45.9	38.4	69.9	44.5	7.9	9.1	8.1

Order Information

LOAD RATING		PART #	EST. SHIPPING WEIGHT	PRICE
15 kg	33.0 lb	100272	1 lb	Consult
37.5 kg	82.6 lb	104645	1 lb	Consult
75 kg	165.3 lb	100273	1 lb	Consult
150 kg	330.7 lb	100274	1 lb	Consult

Interchangeable Products

MANUFACTURER	MODEL	PAGE #
Flintec™	PB	236