


SCT-30 and SCT-40

Signal Conditioning Transmitter/Indicator

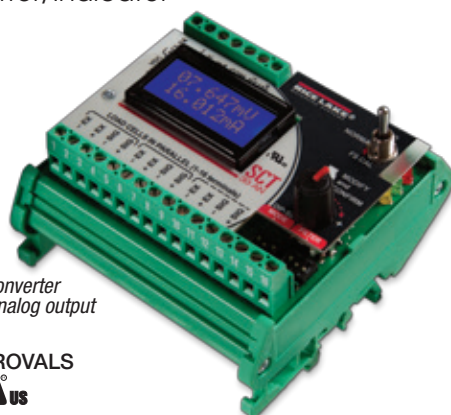

SCT converter
with analog output

APPROVALS
c US



APPROVALS
c US

SCT-30 Specifications

SCT-40 Specifications

Power	Input: 12 -24 VDC Power consumption: 3 watts	Input: 12 -24 VDC Power consumption: SW
Excitation Voltage	5 VDC, 120 mA, 8 x 350 Ω	5 VDC, 240 mA, 16 x 350 Ω
Analog Signal Input Range	± 39 mV	± 39 mV
Analog Signal Sensitivity	0.1 μ V/graduation minimum 1.0 μ V/graduation recommended	0.1 μ V/graduation minimum 1.0 μ V/graduation recommended
A/D Sample Rate	300 Hz	600 Hz
Resolution	Internal resolution: 16 million counts System linearity: $\pm 0.01\%$ full scale	Internal resolution: 16 million counts Weight display resolution: 999,999 System linearity: $\pm 0.01\%$ full scale
Digital Inputs/Outputs	N/A	3 inputs 5-24 VDC, 5 outputs, 115 VAC/150 mA
Serial Port	RS-485	RS-485 or RS-232 simplex supports up to 115,200 bps
Analog Output	Optoisolated, 16 bit 0-20 mA, 4-20 mA (max 300 ohm) 0-10 VDC, 0-5 VDC (min 10,000 ohm)	Optoisolated, 16 bit 0-20 mA, 4-20 mA (max 300 ohm) 0-10 VDC, 0-5 VDC (min 10,000 ohm)
Display	8-digit alphanumeric tow line LCD, 5 mm high	Backlit graphic LCD, transmissive 128 x 64 pixel resolution, 60 x 32 mm visible area
Keyboard	Control knob and DIP switches	Five-key tactile keypad Tes, Zero, Tare, Print Menu, Escape, Left and Up, Navigator, Enter
Operating Temperature & Humidity	Working temperature: -4° F to 140° F (-20° C to 60° C) Humidity: 85% non-condensing	Working temperature: -4° F to 140° F (-20° C to 60° C) Humidity: 85% non-condensing
Dimensions	SCT converter (W x H x D): 3.54 in x 3.74 in x 2.36 in (90 mm x 95 mm x 60 mm) IP67 enclosure (W x H x D): 6.69 in x 5.51 in x 3.74 in (170 mm x 140 mm x 95 mm)	SCT converter (W x H x D): 5.82 in x 3.62 in x 2.36 in (148 mm x 92 mm x 60 mm)
Weight	1 lb (0.5 kg)	1 lb (0.5 kg)
Rating/Material:	DIN rail mount: NEMA Type 1 Sealed enclosure: NEMA Type 4/IP67, plastic enclosre, clear cover, 6 PG9 cord grips	DIN rail mount: NEMA Type 1 Sealed enclosure: NEMA Type 4/IP67, plastic enclosre, clear cover, 6 PG9 cord grips
Warranty	One-year limited warranty	One-year limited warranty

Standard Features

- LCD display, 5 mm, 8-digit
- Powers up to eight (350 Ω) load cells in parallel (with a 24-bit A/D converter)
- A/D converter 24-bit (16,000,000 points) 4.8 kHz
- 16-bit analog output: 0-20 mA, 4-20 mA, 0-5 V, 0-10 V, ± 5 V, and ± 10 V
- Mounting on Omega/DIN rail for back panel or junction box
- IP67-rated enclosed versions
- Diagnostic message for load cell disconnect and over capacity errors

Standard Features

- LCD display, 60 mm x 32 mm
- Supports up to 8 independent reading channels for load cells
- Displays weight, configuration, calibration and error conditions
- DIN rail mounting
- Theoretical calibration, real-weight calibration and error conditions
- Push button or preset tare
- Converts digital weight to analog output or optional DeviceNet™, Profibus™ or EtherNet/IP™ protocols
- Supports ASCII or MODBUS RTU protocols
- Full scale analog cut put with zero setting and PLC correction of analog signal
- Bit swapping selection for little endian and endian format
- 3 digital inputs, 5 digital outputs
- One serial port, RS-232 simplex and RS-485 connection
- CD manual


SCT-10, SCT-20, SCT-30 and SCT-40

Signal Conditioning Transmitter/Indicator

SCT-10

Part Number/Price


PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
129393	SCT-10 converter with analog output	1 lb	Consult
129394	SCT-10 converter with analog output in enclosure	1 lb	Consult
88792	12VDC 1.2 A DIN rail mounted power supply	1 lb	Consult
119244	24VDC 1.3 A DIN rail mounted power supply	1 lb	Consult
131129	Installation manual	1 lb	Consult

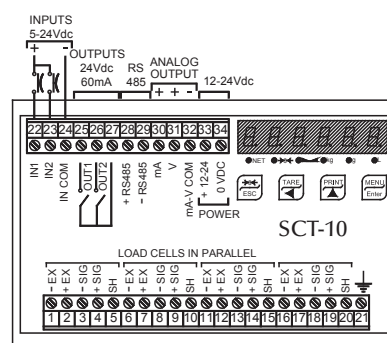

SCT-20

Part Number/Price

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
129396	SCT-20 converter with analog output	1 lb	Consult
129397	SCT-20 converter with DeviceNet™ output	1 lb	Consult
129558	SCT-20 converter with Profibus™ DP	1 lb	Consult
129398	SCT-20 converter with EtherNet/IP™	1 lb	Consult
132534	SCT-20 converter with TCP/IP™ EtherNet	1 lb	Consult
156903	SCT-20 converter with Modbus/TCP	1 lb	Consult
88792	12 VDC 1.2A DIN rail mounted power supply	1 lb	Consult
119244	24 VDC 1.3A DIN rail mounted power supply	1 lb	Consult
131128	Installation manual	1 lb	Consult

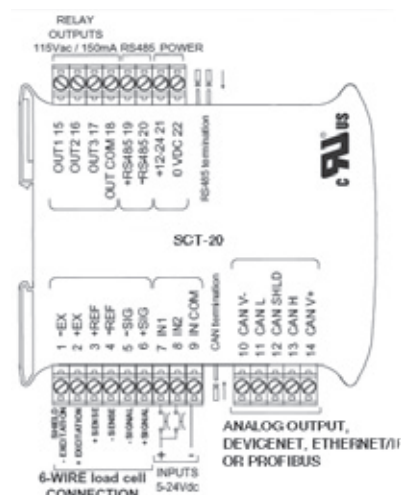

SCT-30

Part Number/Price

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
156794	SCT-30 converter with analog output	1 lb	Consult
156834	SCT-30 converter with analog output in enclosure	1 lb	Consult
88792	12 VDC 1.2A DIN rail mount power supply	1 lb	Consult
119244	24 VDC 1.3A DIN rail mount power supply	1 lb	Consult
131129	Installation manual	1 lb	Consult

SCT-40

Part Number/Price

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
170470	SCT-40 with analog output	1 lb	Consult
170471	SCT-40 with DeviceNet output	1 lb	Consult
170472	SCT-40 with Profibus	1 lb	Consult
170473	SCT-40 with EtherNet/IP	1 lb	Consult
170474	SCT-40 with TCP/IP	1 lb	Consult
170475	SCT-40 with Modbus/TCP	1 lb	Consult
170476	SCT-40 with ProfiNet/I/O	1 lb	Consult
88792	12 VDC 1.2 A DIN rail mounted power supply	1 lb	Consult
119244	24 VDC 1.3 A DIN rail mounted power supply	1 lb	Consult
131128	Installation manual	1 lb	Consult