


220 Compression, Stainless Steel

NTEP 1:10,000 Class III L Multiple Cell



Available upon request

Picture is a representation of actual product

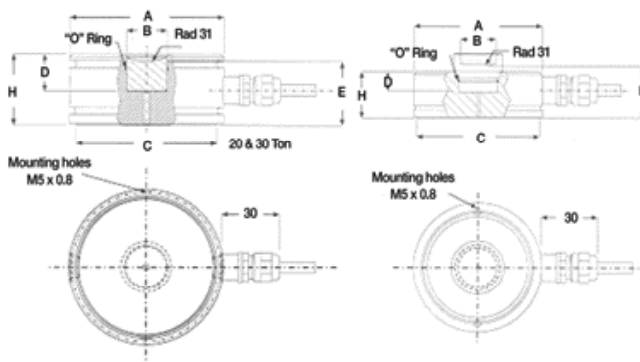

RATED CAPACITY	A	B	DIMENSIONS C	D	E	H
kg/mm						
5000kg	80	19	70	20	33.4	30
lb/inches						
10000kg	92	28	80	14.6	33.4	33
20000kg-30,000kg	110	29	101.5	26.3	39	50

SPECIFICATIONS:

Full Scale Output:	2 mV/V	Seal Type:	Hermetically sealed, IP68
Bridge Resistance:	1000 ohms, nominal	Cable Length:	5 m (5000 kg) 10 m (10-20,000 kg) 20 m (30,000 kg)
Material/Finish:	Stainless steel	Cable Color Code:	Blue +Excitation Black..... -Excitation Green..... +Sense Grey -Sense White +Signal Red -Signal
Temperature:	Operating temperature range 14° to 104°F/-10°C to 40°C	Warranty:	1-year limited warranty
Safe Overload:	150% at center loading point, full scale		
Rated Excitation:	10V DC (15V maximum)		
Total Error:	0.020% full scale		
Insulation Resistance:	2000 megohms		
Deflection at Capacity:	<.5 mm at full scale		

220 ORDER INFORMATION

Load Rating	Part #	Price
5000 kg (11,023.1 lb)	65854.....	\$1,095.00
10,000 kg (22,046.2 lb)	65855.....	\$1,195.00
20,000 kg (44,092.5 lb)	65856.....	\$1,195.00
30,000 kg (66,138.7 lb)	65857.....	\$1,195.00

WEIGH MODULE AVAILABLE

Model	Page #
220	58