


3510-kg Single-Ended Beam, Stainless Steel

Welded-seal, IP68, OIML C3



Picture is a representation of actual product

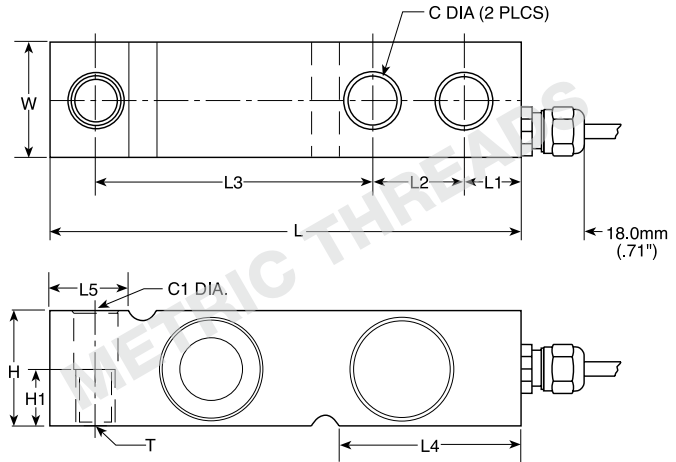

RATED CAPACITY	DIMENSIONS											
	C	C1	H	H1	L	L1	L2	L3	L4	L5	T	W
lb												
1102.3-4409.2	.53	.53	1.26	.63	5.12	.62	1.00	3.00	1.99	.93	M12 X 1.75 Thrd.	1.26
11,023.1	.80	.80	1.89	—	6.75	.75	1.50	3.75	2.76	1.46	—	1.44
kg/mm												
500-2000	13.5	13.5	32.0	16.0	130.0	15.8	25.4	76.2	50.5	23.5	M12 x 1.75 Thrd.	32.0
5000	20.5	20.5	48.0	—	171.5	19.0	38.1	95.3	70.0	37.0	—	36.5

SPECIFICATIONS:

Full Scale Output: 2.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range
14°F to 104°F/-10°C to 40°C
Safe Overload: 150% Full scale
Rated Excitation: 10V DC (15V maximum)
Total Error: 0.02% applied load
Insulation Resistance: 1000 megohms

Deflection at Capacity: 500-5000 kg ≤ .4mm/.015"
Seal Type: Welded-seal*, IP68
Cable Length: 5 m/16.4'
Cable Color Code: Blue + Excitation
Black - Excitation
Green..... + Sense
Grey..... - Sense
White + Signal
Red..... - Signal
Warranty: 1-year limited warranty

3510-kg ORDER INFORMATION

Load Rating	Part #	Price
500 kg (1102.3 lb)	30161.....	\$485.00
1000 kg (2204.6 lb)	30162.....	\$485.00
2000 kg (4409.2 lb)	30163.....	\$485.00
5000 kg (11,023.1 lb)	30164.....	\$555.00

* Conduit is recommended for maximum protection against the ingress of water and moisture through the cable entry

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems	(see page 119) RLHTO

WEIGH MODULE AVAILABLE

Model	Page #
1700HE	14