
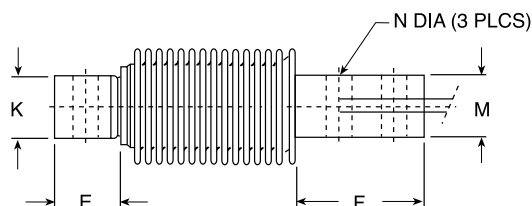


355 Single-Ended Beam, Stainless Steel

Welded-seal, IP68, NTEP 1:4000 Single Cell, 1:5000, Multiple Cell, Class III

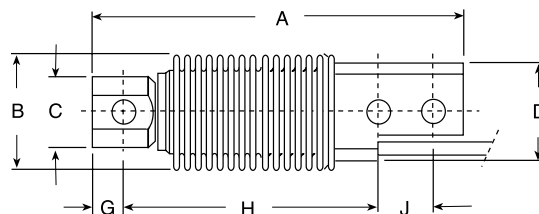

Available upon request

Picture is a representation of actual product

RATED CAPACITY	DIMENSIONS											
	A	B	C	D	E	F	G	H	J	K	M	N
lb												
11.0-1102.3	4.72	1.61	.91	1.26	.81	1.79	.39	3.23	.71	.79	.79	.32
kg/mm												
5-500	120.0	40.0	23.0	32.0	20.5	45.5	10.0	82.0	18.0	20.0	20.0	8.20

SPECIFICATIONS:

Full Scale Output:	2.0 mV/V
Bridge Resistance:	350 ohms, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40° C
Safe Overload:	150% Full scale
Rated Excitation:	10V DC (15V maximum)
Total Error:	0.02% Full scale
Insulation Resistance:	1000 megohms

Deflection at Capacity:	5-250 kg ≤ .4 mm/.015"
Seal Type:	Welded-seal, IP68
Cable Length:	3 m/10'
Cable Color Code:	Blue + Excitation Black - Excitation White + Signal Red - Signal Green + Sense Gray - Sense
Warranty:	1-year limited warranty

355 ORDER INFORMATION

Load Rating	Part #	Price
5 kg (11.0 lb)	30165.....	\$525.00
10 kg (22.0 lb)	30166.....	\$525.00
20 kg (44.1 lb)	30167.....	\$525.00
50 kg (110.2 lb)	30168.....	\$525.00
100 kg (220.5 lb)	30169.....	\$525.00
200 kg (440.9 lb)	30170.....	\$525.00
250 kg (551.2 lb)	30171.....	\$525.00
500 kg (1102.3 lb)	36463.....	\$525.00

INTERCHANGEABLE PRODUCTS

Manufacturer	Model
Rice Lake Weighing Systems.....	(see page 130) RLHBB
Revere Transducers.....	(see page 270) SHB
Vishay Celtron	(see page 190) HBB
HBM	(see page 239) Z6

WEIGH MODULE AVAILABLE

Model	Page #
1700HE	16