

Model 5330 Hollow Flange Reaction Torque Cell

Why the Interface model 5330 Reaction Torque Cell is the best in class:

- High Torsional Stiffness
- Extraneous Load Resistance
- Compact Size



SPECIFICATIONS

ACCURACY – (MAX ERROR)

Nonlinearity—% FS±0.1
Hysteresis—% FS±0.25
Nonrepeatability—%±0.05

TEMPERATURE

Compensated Range—°F±75 to ±175
Compensated Range—°C+24 to +80
Operating Range—°F-65 to +225
Operating Range—°C-54 to +107
Effect on Output—%/°F-MAX±0.002
Effect on Zero—% RO/°F-MAX±0.002

ELECTRICAL


Rated Output—mV/V (Nominal)2.0
(5330-60 thru 6K1.0)
Bridge Resistance—Ohm (Nominal)350
(5330-3K thru 100K700)
Excitation Voltage-MAX10 VDC

MECHANICAL

CalibrationCW & CCW
Safe Overload—% CAP200

DIMENSIONS

See Drawing	MODEL 5330 HOLLOW FLANGE TYPE				
	CAPACITY (lb-in)				
	60, 120, 240	600, 1200	3K, 6K	10K, 20K	50K, 100K
	inch	inch	inch	inch	inch
①	0.3125	0.3125	0.3125	0.625	0.625
②	2	2.5	3.375	4.375	7.00
③	2.5	3.25	4	5	8.5
④	2.125	2.125	2.125	3.5	3.5
⑤	0.203 thru 2 places	0.39 thru 2 places	0.406 thru 4 places	3/8-24 UNF 6 places	0.63 thru 8 places
⑥	.875 thru	1.375 thru	2.375 thru	3.375 thru	3.375 thru

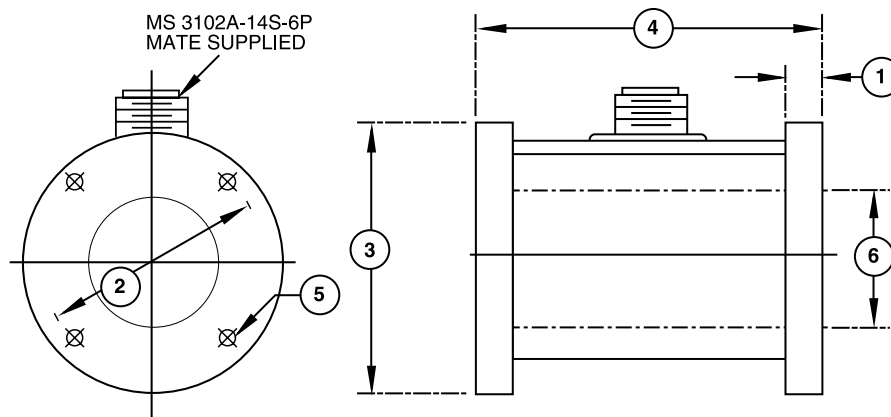

Model 5330