


Picture is a representation of actual product

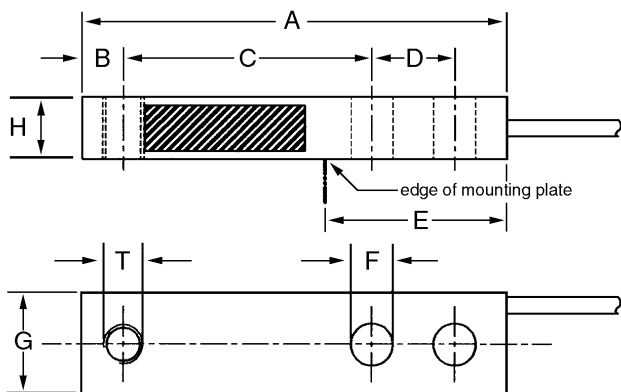

SPECIFICATIONS:

Full Scale Output:	2.0±0.002**
Bridge Resistance:	1000 ohm, nominal
Material/Finish:	Stainless steel
Temperature:	Compensated range 14°F to 104°F/-10°C to 40°C
Safe Overload:	200% Full scale
Safe Sideload:	100% Full scale
Rated Excitation:	10V AC/DC (15V maximum)
Combined Error:	.030%
Insulation Resistance:	5000 megohms
Seal Type:	Potted, IP67
Cable Length:	10'/3.1 m
Cable Diameter:	.196polyurethane jacket
Cable Color Code:	Green + Excitation Black - Excitation White + Signal Red - Signal Yellow - Shield
Warranty:	One-year limited warranty

Approvals:



DIMENSIONS

Rated Capacity lb/inches	A	B	C	D	E	F	G	H	I
440.9	5.06	.50	3.00	1.00	2.12	.51 (2x)	1.25	.62	1/2-20 UNF
1102.5	5.06	.50	3.00	1.00	2.12	.51 (2x)	1.25	.62	1/2-20 UNF
2205.0	5.06	.50	3.00	1.00	2.12	.51 (2x)	1.25	.75	1/2-20 UNF
4410.0	5.06	.50	3.00	1.00	2.12	.51 (2x)	1.25	.99	1/2-20 UNF
kg/mm									
200***	128.5	12.7	76.2	25.4	53.8	13(2x)	31.8	16.1	1/2-20 UNF
500	128.5	12.7	76.2	25.4	53.8	13(2x)	31.8	16.1	1/2-20 UNF
1000	128.5	12.7	76.2	25.4	53.8	13(2x)	31.8	19.1	1/2-20 UNF
2000	130.2	12.7	76.2	25.4	53.8	13(2x)	31.8	25.4	1/2-20 UNF

*** NOT NTEP-approved

BK2 Order Information

Load Rating	Part#	Price
200 kg*** (440.9 lb)	84838	Consult
500 kg (1102.5 lb)	84839	Consult
1000 kg (2205.0 lb)	84840	Consult
2000 kg (4410.0 lb)	84841	Consult

*Metric thread is available

**Matched outputs via mV/V ohm calibration

***NOT NTEP-approved