


SL26S5 Compression Canister

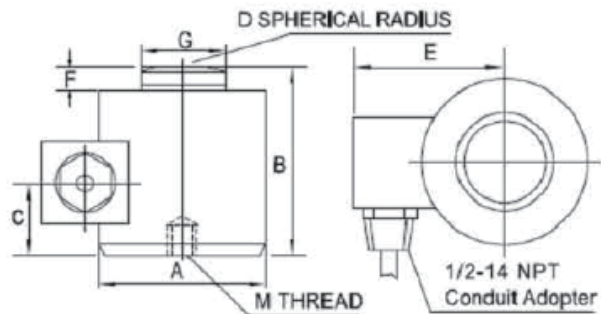

SPECIFICATIONS

Rated Output	$2 \pm 0.01 \text{ mV/V FS}$	Temperature Shift On Zero	$\pm 0.027\% \text{ FS}/10^\circ\text{C}$
Nonlinearity	$\pm 0.05\% \text{ FS}$	Temperature Shift On Rated Output	$\pm 0.015\% \text{ FS}/10^\circ\text{C}$
Hysteresis	$\pm 0.03\% \text{ FS}$	Excitation Voltage- Recommended	10VDC
Repeatability	$\pm 0.01\% \text{ FS}$	Excitation Voltage- MAX	15VDC
Creep	$\pm 0.03\% \text{ FS}/30\text{min}$	Compensated Temperature Range	-10 to $+50^\circ\text{C}$
Zero Balance	$\pm 1\% \text{ FS}$	Operating Temperature Range	-20 to $+60^\circ\text{C}$
Input Resistance	$450 \pm 5 \Omega$	Safe Overload	150% FS
Output Resistance	$480 \pm 3 \Omega$	Ultimate Overload	300% FS
Insulation Resistance	$\geq 5000 \text{ M}\Omega$	Protection Class	IP67
Material	Stainless Steel	Cable Length	29.5' / 9m
Cable Color Code	Red +Excitation, Black -Excitation, Green +Signal, White -Signal		

DIMENSIONS

			inch					
Capacities	M		A	B	C	F	G	D
lb	inch	dp						
10k, 25k, 50k	1/2-20	0.31	2.88	3.25	1.58	0.40	1.25	6.00
100k	3/4-16	0.56	4.12	5.00	2.45	0.51	2.31	6.00
200k, 300k	3/4-16	0.75	6.00	7.25	3.65	1.04	3.13	17.00
500k	3/4-16	0.75	6.50	9.00	4.81	1.00	3.69	17.00

Dimensions and specifications are subject to change without notice.



San Diego, CA USA

<http://www.sensolink.com>

E-mail: sales@sensolink.com