


SLP3 Single-Ended Shear Beam Stainless Steel

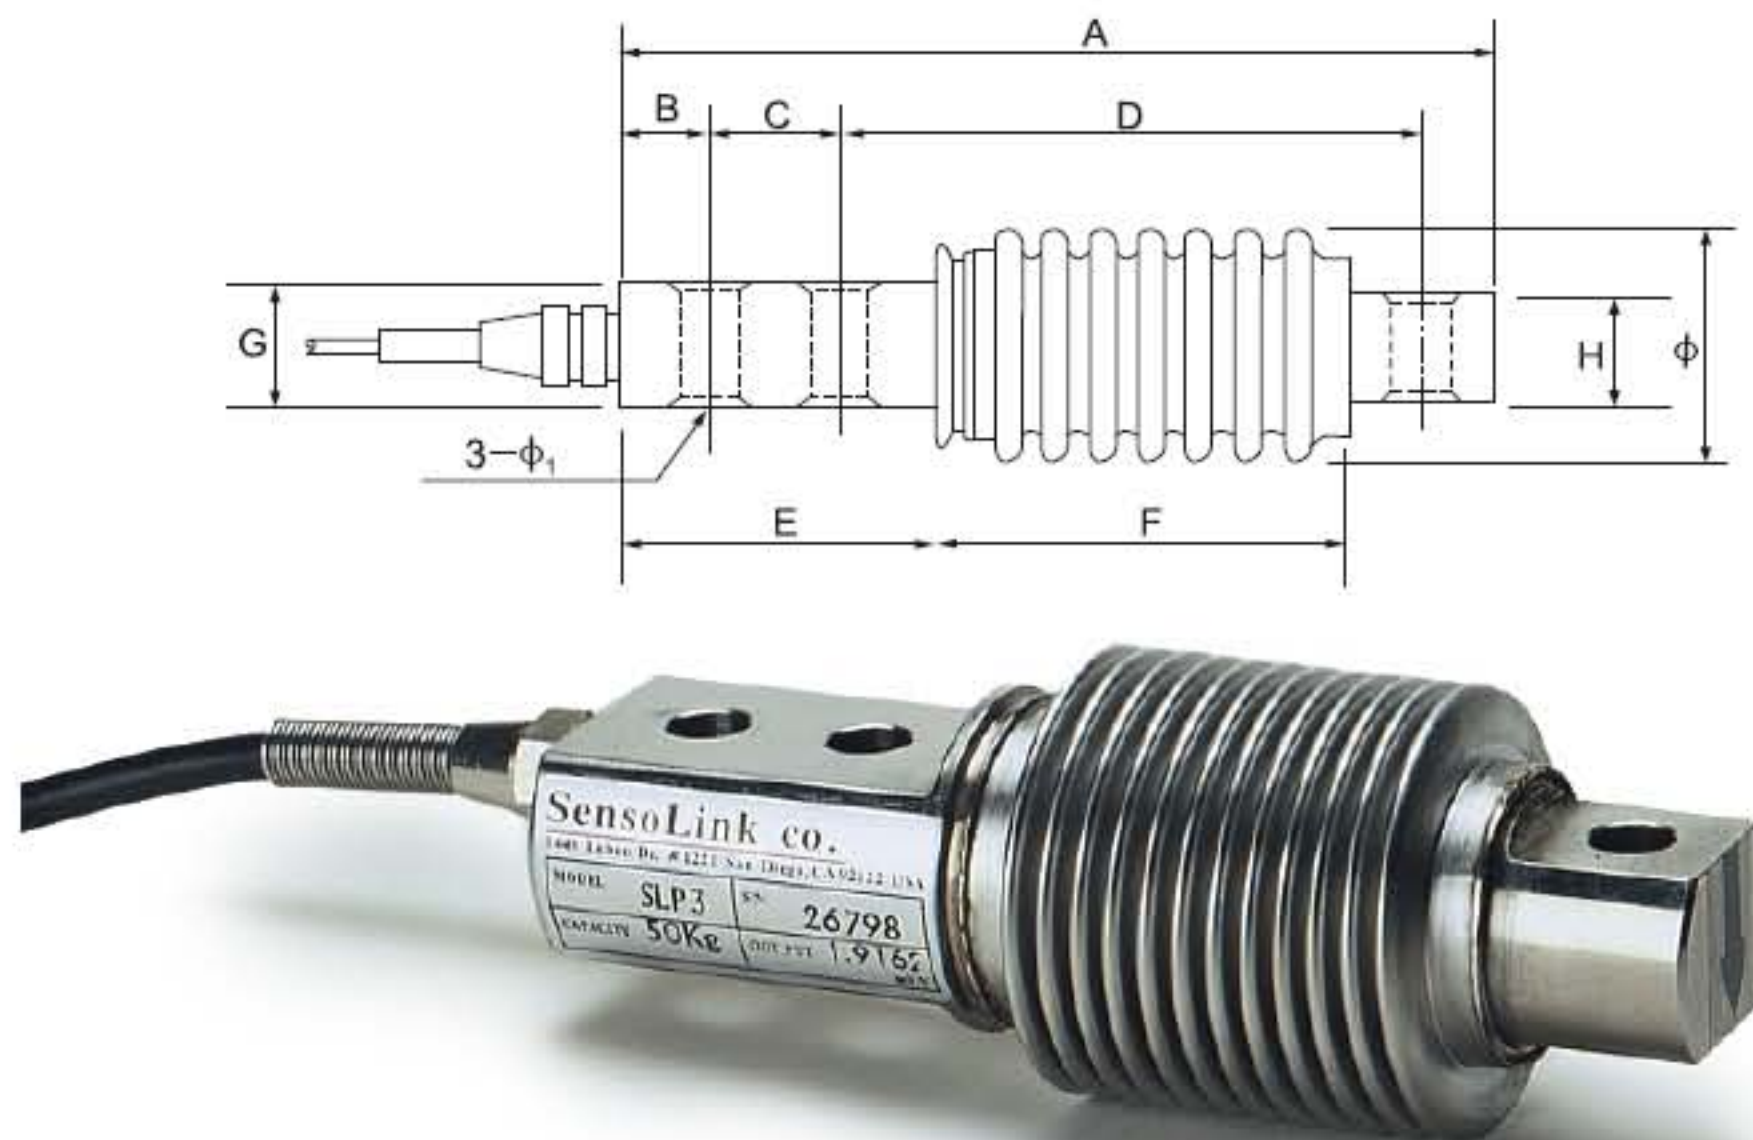

SPECIFICATIONS:

Rated Output	$2 \pm 0.01 \text{ mV/V FS}$
Nonlinearity	$\pm 0.02\% \text{ FS}$
Hysteresis	$\pm 0.02\% \text{ FS}$
Repeatability	$\pm 0.01\% \text{ FS}$
Creep	$\pm 0.02\% \text{ FS/30min}$
Zero Balance	$\pm 1\% \text{ FS}$
Temperature Effect On Zero	$\pm 0.02\% \text{ FS/10}^\circ\text{C}$
Temperature Effect On Rated Output	$\pm 0.02\% \text{ FS/10}^\circ\text{C}$
Input Resistance	$385 \pm 10 \Omega$
Output Resistance	$350 \pm 3 \Omega$
Insulation Resistance	$\geq 5000 \text{ M}\Omega$
Excitation Voltage	10(Recommended), 15(Max)VDC/AC
Compensated Temperature Range	$-10 \text{ to } +50^\circ\text{C}$
Operating Temperature Range	$-20 \text{ to } +60^\circ\text{C}$
Safe Overload	150% FS
Ultimate Overload	300% FS
Protection Class	IP 67
Cable Length	16.4' / 5m
Cable Color Code	Red + Excitation, Black -Excitation, Green + Signal, White -Signal

DIMENSIONS:

Capacity	mm									
	A	B	C	D	E	F	G	H	$\emptyset$	$\emptyset_1$
kg										
10, 20, 30, 50, 100, 200	123	13	18	82	45	58	22	20	41	8.5
300, 500, 700, 1000	210	15	40	133	84	82	40	25	56	13

Dimensions and specifications are subject to change without notice.