


9363 S-Beam, Stainless Steel

NTEP 1:10,000 Class IIIL Single Cell, IP67



Picture is a representation of actual product

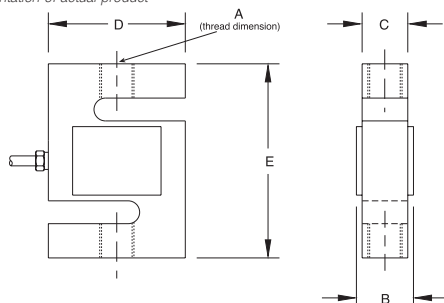

SPECIFICATIONS:

Full Scale Output: 3.0 mV/V
Bridge Resistance: 350 ohms, nominal
Material/Finish: Stainless steel
Temperature: Compensated range 14°F to 104°F/-10°C to 40°C

Manufacturer
Model Number: 9363-B10-XX-20T1 (NTEP)
 9363-D3-XX-20T1 (Non-NTEP)

Safe Overload: 150% Full Scale
Rated Excitation: 10V DC (15V maximum)
Combined Error: 0.025% Full Scale
Non-repeatability: 0.01% Full Scale
Insulation Resistance: 5000 megohms
Seal Type: Environmentally sealed, IP67
Cable Length: 20'/6.1 m
Cable Color Code: Red..... + Excitation
 Black..... - Excitation
 Green..... + Signal
 White..... - Signal
 Orange..... - Shield

Warranty: One-year limited warranty
Approvals:



DIMENSIONS

Rated Capacity	A	B	C	D	E
lb/inches					
50-300	1/4-28 UNF-2B	.65	.46	2.00	2.40
500-1500	1/2-20 UNF-2B	.90	.71	2.00	2.40
2000-2500	1/2-20 UNF-2B	1.13	.96	2.00	2.40
3000	1/2-20 UNF-2B	1.13	.96	3.00	3.90
5000	3/4-16 UNF-2B	1.13	.96	3.00	3.90
10,000	3/4-16 UNF-2B	1.63	1.21	2.94	3.90
kg/mm					
22.7-136.1	1/4-28 UNF-2B	16.5	11.7	50.8	61.0
226.8-680.4	1/2-20 UNF-2B	22.9	18.0	50.8	61.0
907.2	1/2-20 UNF-2B	29.2	24.4	50.8	61.0
1360.8	1/2-20 UNF-2B	29.2	24.4	76.2	99.1
2268.0-4535.9	3/4-16 UNF-2B	29.2	24.4	76.2	99.1

9363 Order Information

Load Rating	Part #	Price
NTEP 1:10,000		
100 lb (45.4 kg)	31317	Consult
200 lb (90.7 kg)	31316	Consult
300 lb (136.1 kg)	31315	Consult
500 lb (226.8 kg)	31314	Consult
750 lb (340.2 kg)	31313	Consult
1000 lb (453.6 kg)	31312	Consult
1500 lb (680.4 kg)	31311	Consult
2000 lb (907.2 kg)	31310	Consult
2500 lb (1134.0 kg)	98875	Consult
3000 lb (1360.8 kg)	31309	Consult
5000 lb (2268.0 kg)	31318	Consult
10,000 lb (4535.9 kg)	31308	Consult
Non-NTEP		
50 lb (22.7 kg)	17076	Consult

Interchangeable Products

Manufacturer	Model	Page #
Rice Lake Weighing Systems	RL20000 SS	103
Rice Lake Weighing Systems	RL20000 ST	104

Weigh Module Available

Model	Page #
ITCM Isolated Tension Cell Mount	350